


# TRION-2402-MULTI



- ▶ Universal analog module
- ▶ Sampling: 24 bit, 200 kS/s per channel
- ▶ Input types: Voltage, bridge, resistance, RTD, IEPE®
- ▶ CAN: High-speed CAN2.0 port

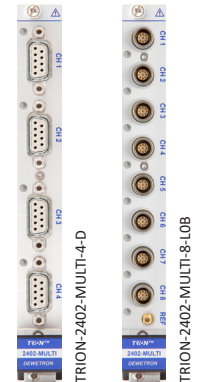

## Module specifications

TRION-2402-MULTI specifications		
Input channels	TRION-2402-MULTI-4-D	4 channels D-SUB connector (CH1 can be used as CAN port)
	TRION-2402-MULTI-8-LOB	8 channels 0B LEMO connector (CH1 can be used as CAN port)
ADC		
– Resolution	24 bit	
– Sampling rate	1 kS/s to 200 kS/s per channel	
Input ranges		
– Voltage	$\pm 2$ mV to $\pm 100$ V freely programmable	
– IEPE®	$\pm 100$ mV to $\pm 10$ V freely programmable	
– Bridge	$\pm 1$ to 1000 mV/V	
– Resistance	10 $\Omega$ , 30 $\Omega$ , 100 $\Omega$ , 300 $\Omega$ , 1 k $\Omega$ , 3 k $\Omega$ , 10 k $\Omega$ , 30 k $\Omega$	
Accuracy <sup>1)</sup>	$\pm 0.02$ % of reading $\pm 0.02$ % of range $\pm 20$ $\mu$ V	
– Gain drift	Typical 10 ppm/ $^{\circ}$ C max. 20 ppm/ $^{\circ}$ C	
– Offset drift	Typical 0.3 $\mu$ V/ $^{\circ}$ C + 10 ppm of range/ $^{\circ}$ C, max 2 $\mu$ V/ $^{\circ}$ C + 20 ppm of range/ $^{\circ}$ C	
– Linearity	Typical $\pm 0.01$ %	
Input impedance	0 to 10 V range	100 M $\Omega$
	>10 to 100 V range	2 M $\Omega$
Input bias current	<5 nA	
Input configuration	Single-ended or differential (programmable)	
Input coupling	DC / AC (high pass filter 0.16 Hz)	
Rated input voltage to earth according to EN 61010-2-30	33 V <sub>RMS</sub> , 46.7 V <sub>PEAK</sub> , 70 V <sub>DC</sub>	
Isolation voltage (channel-to-channel and channel-to-chassis)	350 V <sub>DC</sub>	
Common mode voltage to GND <sub>isolated</sub>	0 to 10 V range	$\pm 10$ V <sub>DC</sub>
	>10 to 100 V range	$\pm 100$ V <sub>DC</sub>
Overvoltage protection	0 to 10 V range	$\pm 50$ V <sub>DC</sub> continuous, 100 V <sub>DC</sub> (1 min)
	>10 to 100 V range	$\pm 200$ V <sub>DC</sub>

Tab. 30: Module specifications

<b>TRION-2402-MULTI specifications</b>	
Excitation voltage range	0 to 24 V <sub>DC</sub> freely programmable; separately for each channel
– Resolution	1 mV
– 1 year accuracy	±0.03 % ±1.5 mV
– Drift	±10 ppm/°C ±50 µV/°C
– Current limit	0.1 to 5 V: 100 mA >5 V to 24 V: limited to 0.5 W
– Protection	Continuous short
– Load and line regulation error	±0.002 % with sense line connected
Excitation current	0.1 to 60 mADC (programmable, 16-bit DAC)
– Resolution	1 µA
– 1 year accuracy	0.1 to 5 mA: 0.05 % ±2 µA >5 to 60 mA: 2 % ±5 µA
– Drift	15 ppm/°C
– Compliance voltage	0.1 to 20 mA: 24 V >20 mA: 10 V
– Output impedance	>10 MΩ
Supported sensors	<ul style="list-style-type: none"> <li>▶ 4-or 6-wire full bridge</li> <li>▶ 3-or 5-wire ½ bridge with internal completion (software programmable)</li> <li>▶ 3- or 4-wire ¼ bridge with internal resistor for 120 Ω and 350 Ω (software programmable)</li> <li>▶ 4-wire full bridge with constant current excitation (piezoresistive bridge sensors)</li> <li>▶ Potentiometer</li> <li>▶ Resistance</li> <li>▶ Resistance temperature detection: Pt100, Pt200, Pt300, Pt500, Pt1000, Pt2000 (2-, 3-, 4-wire)</li> <li>▶ IEPE®</li> </ul>
Bridge resistance	80 Ω to 10 kΩ @ ≤5 V <sub>DC</sub> excitation
Shunt calibration	Two internal shunt resistors 50 kΩ and 100 kΩ
Shunt and completion resistor accuracy	0.05 % ±15 ppm/K
Automatic bridge balance	±400 % of range
Low pass filter (-3 dB, digital)	1 Hz to 40 % of sample rate freely programmable or OFF
– Characteristic	Bessel or Butterworth
– Filter order	2 <sup>nd</sup> , 4 <sup>th</sup> , 6 <sup>th</sup> , 8 <sup>th</sup>
– Filter setting AUTO	30 % of sample rate with 8th order Bessel
Analog anti-aliasing filter	2 <sup>nd</sup> order Bessel,
Sample rate > 10 kS/s	250 kHz (-3 dB), 150 kHz (-1 dB)
ADC anti-aliasing filter	-3 dB @ Filter = OFF
– 1 kS/s ≤ fs ≤ 51.2 kS/s	0.494 fs
– 51.2 kS/s < fs ≤ 102.4 kS/s	0.49 fs
– 102.4 kS/s < fs ≤ 200 kS/s	0.38 fs

fs = sample frequency

Tab. 30: Module specifications

TRION-2402-MULTI specifications																
Typical signal-to-noise ratio, spurious Free SNR, effective number of Bits <sup>2)</sup>	10 mV range				100 mV range				1 V range				10 V range			
	SNR	SFDR <sup>3)</sup>	ENOB <sup>4)</sup>	Noise	SNR	SFDR <sup>3)</sup>	ENOB <sup>4)</sup>	Noise	SNR	SFDR <sup>3)</sup>	ENOB <sup>4)</sup>	Noise	SNR	SFDR <sup>3)</sup>	ENOB <sup>4)</sup>	Noise
Sample rate	[dB]	[dB]	[Bit]	[mV <sub>pp</sub> ]	[dB]	[dB]	[Bit]	[mV <sub>pp</sub> ]	[dB]	[dB]	[Bit]	[mV <sub>pp</sub> ]	[dB]	[dB]	[Bit]	[mV <sub>pp</sub> ]
1 kS/s	82	108	13.3	0.002	101	128	16.5	0.002	111	141	18.1	0.025	112	141	18.3	0.100
10 kS/s	82	108	13.3	0.005	101	123	16.5	0.005	106	134	17.3	0.030	112	140	18.3	0.120
100 kS/s	72	103	11.7	0.015	92	123	15.0	0.016	104	134	17.0	0.058	104	136	17.0	0.210
200 kS/s	69	99	11.2	0.022	88	120	14.3	0.025	88	133	14.3	0.230	96	135	15.7	0.950
200 kS/s; Filter = OFF	69	99	11.2	0.059	80	106	13.0	0.061	81	106	13.2	1.300	81	106	13.2	5.400
Typical THD	-100 dB															
Typical crosstalk	-125 dB (10 V range; 0 to 1 kHz)															
Typical CMRR	110 dB @ 50 Hz, 90 dB @ 1 kHz, 80 dB @ 10 kHz															
Self test (self calibration)	Each channel is able to perform a complex self test by using internal high precision references															
Channel-to-channel phase mismatch	Typically <60 ns between channels using the same range															
CAN specification	CAN 2.0															
CAN physical layer	High-speed															
CAN termination	Programmable: high impedance or 120 Ω															
Bus fault pin protection	±36 V <sub>DC</sub>															
Input connector	9-pin LEMO EPG.0B.309, 9-pin D-SUB connector															
REF connector	SMB															
Supported MSI	MSI-BR-TH-x, MSI-BR-CH-x, MSI2-TH-x, MSI2-CH-x, MSI2-LVDT															
Power consumption	TRION-2402-MULTI-4-D								Typ. 8 W, max. 13 W							
	TRION-2402-MULTI-8-LOB								Typ. 13 W, max. 23 W							
	– Voltage mode, no excitation								10.5 W							
	– IEPE® mode (4 mA / 8 mA)								13.5 W / 14.5 W							
	– Loop powered sensor (24 V, 20 mA)								18 W							
– 350 Ω full bridge (5 V / 10 V)								13 W / 16 W								
– PT100, PT1000								13 W								

Tab. 30: Module specifications

1) 1 year accuracy 23 °C ±5 °C

2) LP Filter in auto mode

3) SFDR excluding harmonics

4) ENOB calculated from SNR