



DEWE-IRIG-CLOCK Card

Pinbelegungen

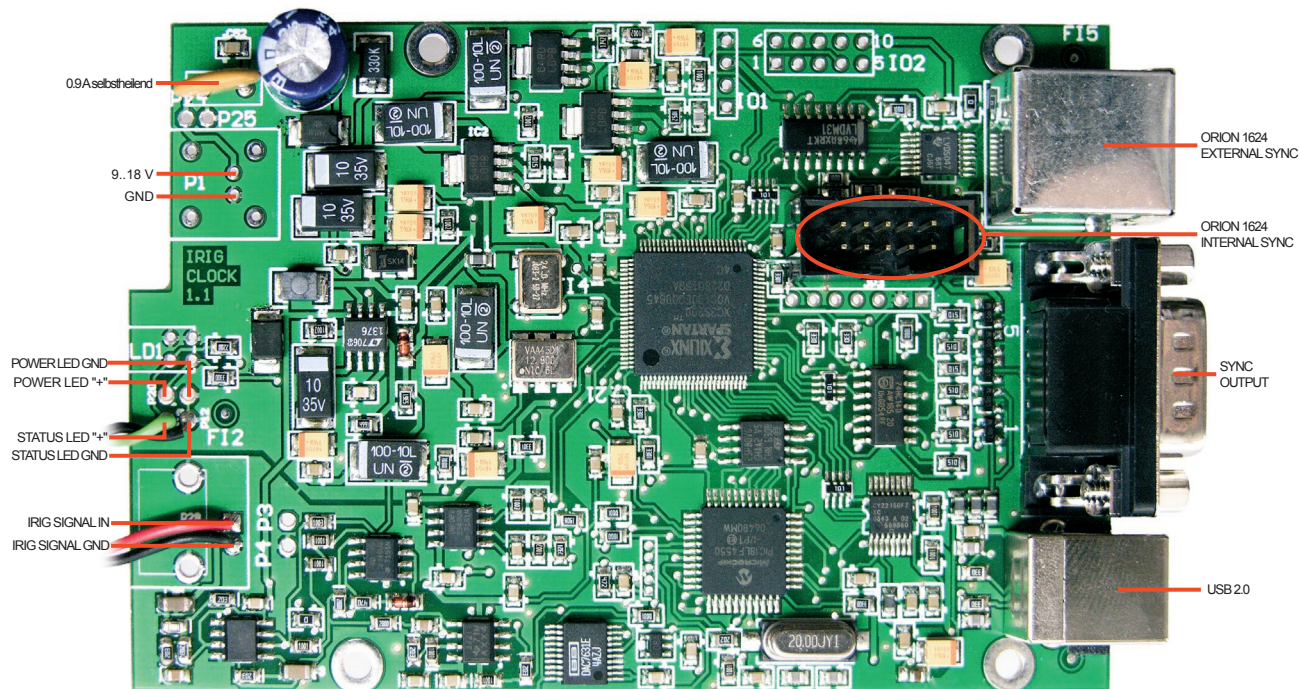

9-pin DSUB female




- 1.) PPS (Pulse per seconds)
- 2.) Scan clock output
- 3.) Reserved
- 4.) Reserved
- 5.) Reserved
- 6.) GND
- 7.) GND
- 8.) GND
- 9.) GND

USB 2.0 Stecker



- 1.) +5V
- 2.) D-
- 3.) D+
- 4.) GND

Abmessungen*

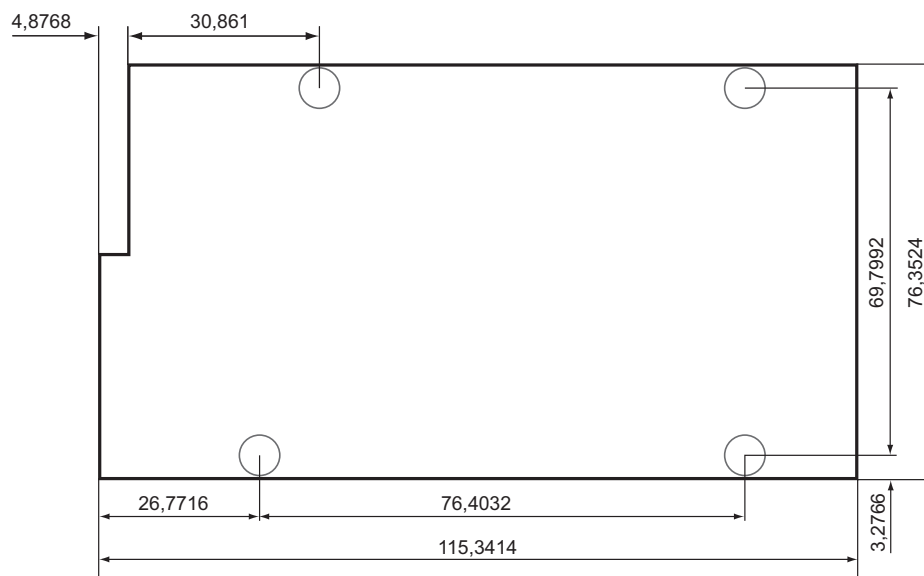

* Angaben in mm
(1 inch = 25.4 mm)

DEWE-IRIG-CLOCK Card

Notizen