



Automotive
Energy & Power Analysis
Field Service
Environmental
Research & Development

DEWE-LVDS/RS422-TTL converter

Technical reference manual



ISO9001

... the precision signal conditioning company




Copyright © DEWETRON elektronische Messgeraete Ges.m.b.H.

This document contains information which is protected by copyright. All rights are reserved. Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

All trademarks and registered trademarks are acknowledged to be the property of their owners.

DEWE-LVDS/RS422-TTL converter

DEWE-LVDS/RS422-TTL converter

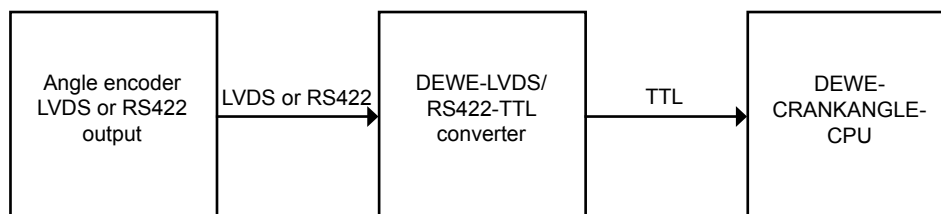

The CDM sensor input of DEWE-CRANKANGLE-CPU supports only TTL signals. With the DEWE-LVDS/RS422-TTL converter it is also possible to connect sensors with a LVDS or RS422 output to the DEWE-CRANKANGLE-CPU.

Examples for supported sensors:

- AVL 365X, AVL 365C
- Kistler 2614A


Specifications

DEWE-LVDS/RS422-TTL converter		
	LVDS	RS422
Termination input resistor:	100 Ω	
Electrical characteristics:		
Differential input high threshold:	max. +100 mV	max. +200 mV
Differential input low threshold:	min. -100 mV	min. -200 mV
Maximum input voltage:	0 to 5 V	
Output:	TTL	
Sensor supply:		
+5 V	5 W	
Constant current source:	83 mA	
-15 V	2 W	

DEWE-LVDS/RS422-TTL converter


Functional description

The block diagram shows the basic operation principal of the DEWE-LVDS/RS422-TTL converter. Basically the converter consists of a LVDS and RS422 receiver, which are selectable by a slide switch. The AVL sensor 365C and 365X needs a current source supply. Therefore two additional current sources are included.

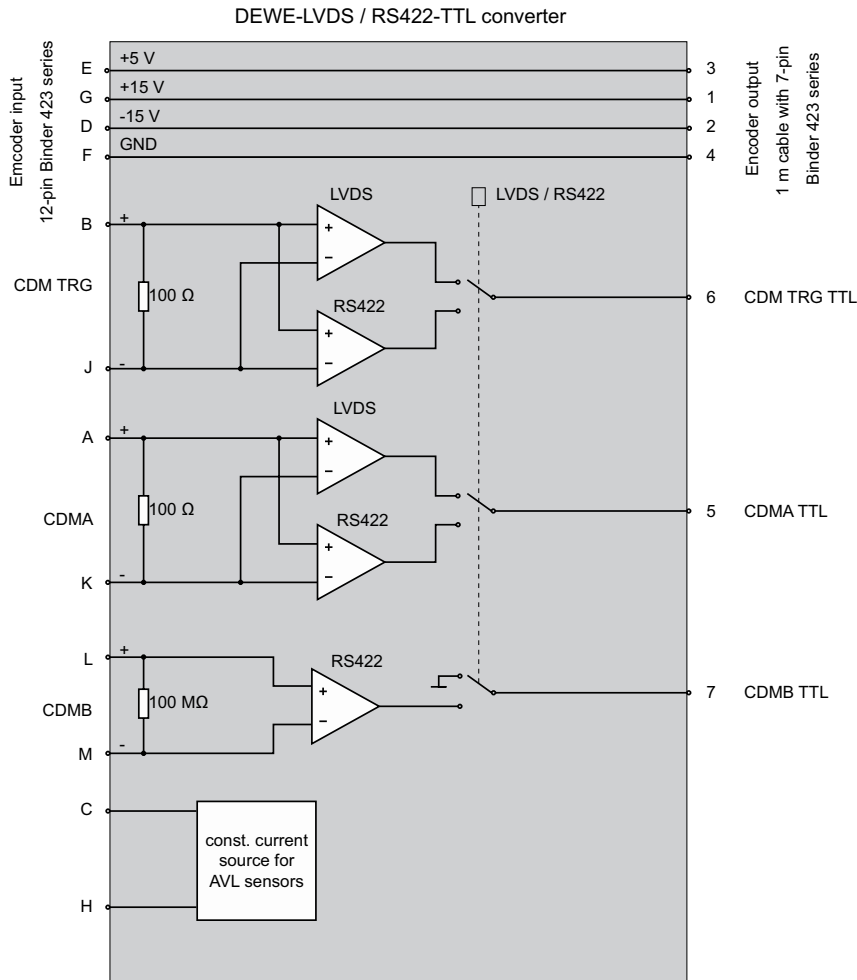

Signal connection

Input connector (12-pin female BINDER 423 series connector)




Pin assignment:

A:	CDMA+	G:	+15 VDC
B:	CDMTRG+	H:	Isource 2
C:	Isource 1	J:	CDMTRG-
D:	-15 VDC	K:	CDMA-
E:	+5 VDC	L:	CDMB+
F:	GND	M:	CDMB-

DEWE-LVDS/RS422-TTL converter

Output connector (7-pin male Amphenol C091A series connector)

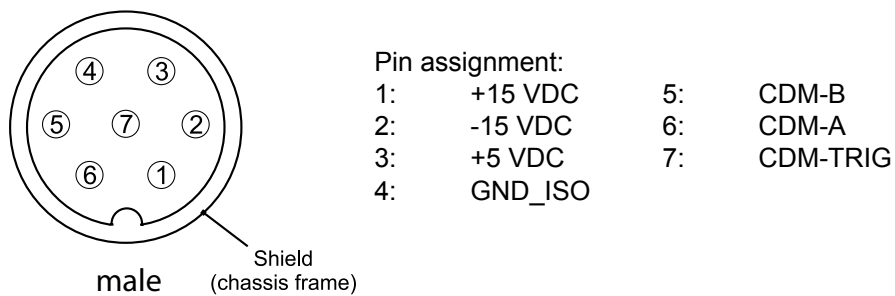

DEWE-LVDS/RS422-TTL converter

Notes