

THE MEASURABLE DIFFERENCE.



DEWETRON

▼

OXYGEN Training > TRION3-AOUT-8 Support





5 different output modes available

- ① Monitor Output
(supported by TRION3-18x0-MULTI-AOUT-8 only)
- ② Math Output
(supported by TRION3-18x0-MULTI-AOUT-8 only)
- ③ Constant Output
(supported by TRION3-AOUT-8 and TRION3-18x0-MULTI-AOUT-8)
- ④ Function Generator
(supported by TRION3-AOUT-8 and TRION3-18x0-MULTI-AOUT-8)
- ⑤ Stream Output aka File Replay
(supported by TRION3-AOUT-8 and TRION3-18x0-MULTI-AOUT-8)

- This presentation will explain the software functions for the TRION3-AOUT-8 module in OXYGEN.
- In order to use some functionalities, the TRION3-AOUT-8 in combination with a TRION3-18xx-MULTI (TRION3-18x0-MULTI-AOUT-8) is required
- Requires OXYGEN R5.4 and TRION Applications R5.4 or higher
- TRION3-AOUT boards provide the following two functions:
 - Conditioned signal output
 - Calculated channel output
- Conditioned Signal Output
 - A direct or processed output of each conditioned analog input of the TRION3-18x0-MULTI is available here. This can be an analog signal as direct output or RMS or average value for the same ranges as processed output.
- Calculated channel output
 - Any channel or the TRION3-18x0-MULTI can be used for basic calculations on the FPGA
- Voltage or current output is available for both functions with the following ranges:
±5 V, ±10 V, 0 - 5 V or 0 - 10 V ±30 mA, 0 - 30 mA




CHANNEL SETUP - OVERVIEW

① Click on the gear button to access the Channel Setup


② Output Amplifier Options. Selection of
- Mode
- Range
- Output Mode
- LP Filter

③ Includes specific settings depending on the Channel Mode

④ Includes the scaling information from Input to output
Can be edited by changing the reference channel's input range or the output channel's range

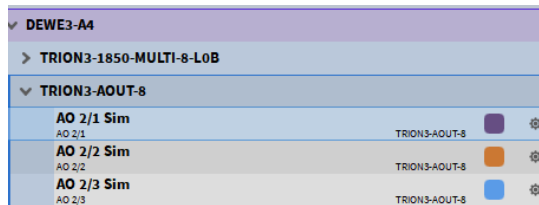

①

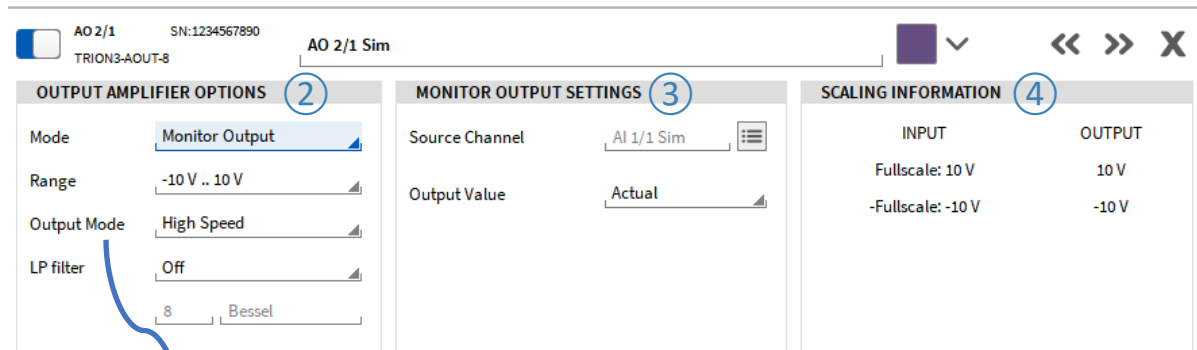

②

③

④

Output Mode	High-speed Mode	High-resolution Mode
Update Rate	2.5 MS/s	500 ks/s
Resolution	16 bit	32 bit
Latency	< 5 μs	< 100 μs

CHANNEL SETUP – MONITOR OUTPUT SETTINGS



DEWETRON

© DEWETRON GmbH | May 24

- 1 Select the reference input channel which shall be output
- 2 Select the output value Actual, Average or RMS
- 3 In case output value is *Average* or *RMS*, a *Moving* or *Fixed Window Type* can be selected
- 4 Calculation Window can be set from 1 ... 1000 ms

AO 2/1 SN:1234567890
TRION3-AOUT-8 AO 2/1 Sim

OUTPUT AMPLIFIER OPTIONS		MONITOR OUTPUT SETTINGS		SCALING INFORMATION	
Mode	Monitor Output	Source Channel	AI 1/1 Sim	INPUT	OUTPUT
Range	-10 V .. 10 V	Output Value	Actual	Fullscale: 10 V	10 V
Output Mode	High Speed			-Fullscale: -10 V	-10 V
LP filter	Off				
	8 Bessel				

MONITOR OUTPUT SETTINGS

Source Channel AI 1/2 Sim

Output Value Average

Window Type Moving

Calculation Window 1000 ms

- Monitor output provides the same functionality as a signal conditioner
- If *Output Value* is *Average* or *RMS*, the calculations will be done on the board's FPGA to ensure minimum latency times



DEWETRON

CHANNEL SETUP – MATH OUTPUT

- 1 Select the reference input channels
- 2 Select the Mathematical operation $A+B$, $A-B$ or $A*B$
- 3 Select the output value Actual, Average or RMS
- 4 In case output value is *Average* or *RMS*, a *Moving* or *Fixed Window Type* can be selected
- 5 Select the output value Actual, Average or RMS
Calculation Window can be set from 1 ... 1000 ms

AO 2/2 SN:1234567890
TRION3-AOUT-8 AO 2/2 Sim

OUTPUT AMPLIFIER OPTIONS	
Mode	Math Output
Range	-10 V .. 10 V
Output Mode	High Resolution
LP filter	Off
	8 Bessel

MATH OUTPUT SETTINGS	
Source Channel A	1 AI 1/2 Sim
Source Channel B	AI 1/2 Sim
Math Operation	2 A+B
Output Value	3 Actual
Output Value	Average
Window Type	4 Moving
Calculation Window	5 1000 ms

SCALING INFORMATION	
INPUT	OUTPUT
Fullscale: 100 V	10 V
-Fullscale: -100 V	-10 V

- Math Output can be used to output the sum, difference or product of two reference input channels
- The calculations will be done on the board's FPGA to ensure minimum latency times



DEWETRON

CHANNEL SETUP – CONSTANT OUTPUT

① Select the desired constant value

AO 2/2 SN:1234567890
TRION3-AOUT-8 AO 2/2 Sim

OUTPUT AMPLIFIER OPTIONS		CONSTANT VALUE OUTPUT SETTINGS	
Mode	Const Output	Source channel A	CONST1
Range	-10 V.. 10 V	Constant value	① 10 V
Output mode	High Resolution		
LP filter	Off		
	8 Bessel		

- Constant Output can be used to output a constant reference value within the selected channel Range



DEWETRON

CHANNEL SETUP – FUNCTION GENERATOR

- 1 Select the desired waveform: Sine, Square, Triangle or a customized pattern
- 2 Select the desired signal frequency from 1 mHz to 1 MHz
- 3 Select the signal amplitude from 0 ... 10 V or 0 ... 30 mA as *Peak* or *RMS* value
- 4 Select a signal offset within the output range
- 5 Select a phase shift from -180° ... 180°
- 6 Select a Dutycycle from 0.01 ... 100%
Only available from Square and Triangular signals

AO 2/1 SN:1234567890
TRION3-AOUT-8 AO 2/1 Sim

OUTPUT AMPLIFIER OPTIONS	FUNCTION GENERATOR OUTPUT SETTINGS	CUSTOM WAVEFORM STORE
Mode: Function Generator	Waveform: 1 Square	Waveforms are shared per module.
Range: -30 mA .. 30 mA	Frequency: 2 1000 Hz	0 1.0 -1.0 Click or drop waveform file here
Output Mode: High Resolution	Amplitude: 3 1 mA	1 1.0 -1.0 Click or drop waveform file here
LP filter: Off	Peak	2 1.0 -1.0 Click or drop waveform file here
8 Bessel	Offset: 4 0 mA	3 1.0 -1.0 Click or drop waveform file here
	Phase: 5 0 deg	
	Dutycycle: 6 50%	

- Function generator provides the ability to output different predefined waveforms or customized patterns
- The calculations will be done on the board's FPGA to ensure minimum latency times



CHANNEL SETUP – CUSTOM WAVEFORM PATTERNS

- Instead of a predefined Sine, Rectangular or Triangular, a customized waveform can be used
- 4 customized waveforms are shared by the entire module
- Waveforms are stored to the dms-setup file
- One waveform can be selected per channel

The screenshot shows the software interface for channel setup. It includes three main panels:

- OUTPUT AMPLIFIER OPTIONS:** Mode (Function Generator), Range (-10 V .. 10 V), Output Mode (High Resolution), LP filter (Off, 8, Bessel).
- FUNCTION GENERATOR OUTPUT SETTINGS:** Waveform (PATTERN0), Frequency (100 Hz), Amplitude (1 V), Offset (0 V), Phase (0 deg).
- CUSTOM WAVEFORM STORE:** A list of four waveforms (0, 1, 2, 3) with corresponding plots. Waveform 0 is selected.

① Select the desired pattern in the waveform dropdown or select the desired waveform directly in the custom waveform menu

② Load a waveform by dragging and dropping the file into the respective waveform field or by clicking on the field to open a dialog window

③ The defined waveform corresponds to one period and will be repeated periodically. Output rate can be defined by using the Frequency selection

- The waveform file must fulfill the following demands:
 - The file must be a .csv format (④)
 - Each row is one value or sample
 - Only values between -1 and 1 are allowed
The signal will be scaled according to the selected Amplitude (⑤)
 - The separator must be a . (dot)
 - A maximum of 16384 rows are allowed

```

waveform1.csv
Datei Bearbeiten
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0
  
```




CHANNEL SETUP - STREAM OUTPUT

- The Stream Output functionality can be used to output scalar channels via the analog output channels of the TRION3-AOUT board, this is also possible with channels of a previously recorded OXYGEN file.
- To use this option, the software must be in *LIVE* (data acquisition) or *REC* mode
- This mode is not supported in *PLAY* mode

OUTPUT AMPLIFIER OPTIONS	
Mode	StreamOutput ①
Range	-10 V .. 10 V ②
Output Mode	High Speed
LP filter	Off
	8 Bessel

- ① To enable this mode enable *Stream Output* in the output amplifier options of each channel that shall be used for data output
- ② The output signal (voltage or current) and its range can be specified




DEWETRON

OUTPUT CHANNEL INSTRUMENT FOR CONST OUTPUT AND FUNCTION GENERATOR

- Const Output Channels and
- Function Generator Channels can be displayed and changed on the measurement screen

① The Output Channel instrument can be found in the Instruments menu and can be dragged and dropped to the measurement screen

② Selecting the output channels from the channel list will display them in the Output Channel instrument. The const value can be changed via the slider or the numeric input field. The function generator can be customized via drop-down-menus

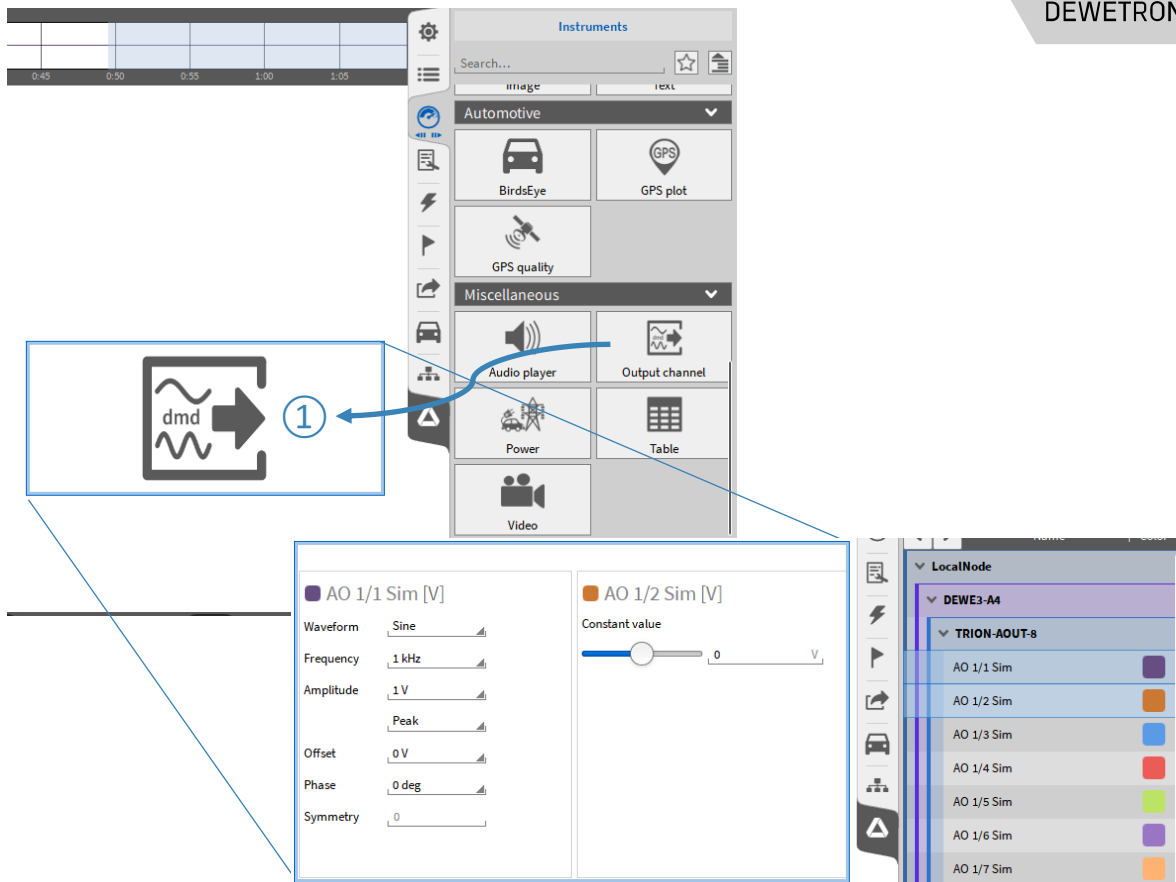



OUTPUT CHANNEL INSTRUMENT FOR STREAM OUTPUT

- A separate Instrument exists for loading the desired data file that shall be replayed
- This Output Channel instrument is also used to assign the channels that shall be output from the data to the respective Analog Output channel

① The Output Channel instrument can be found in the Instruments menu and can be dragged and dropped to the measurement screen

② The analog output channels that shall be used for data replay must be assigned to the Output Channel instrument.

The channel's output mode must be set to Stream output.


The screenshot displays the DEWETRON software interface. At the top, a timeline shows time markers at 0.45, 0.50, 0.55, 1.00, and 1.05. The 'Instruments' panel is open, showing a search bar and a grid of instrument icons. The 'Automotive' category is selected, showing icons for 'BirdsEye', 'GPS plot', and 'GPS quality'. The 'Miscellaneous' category is also visible, showing icons for 'Audio player', 'Output channel', 'Power', 'Table', and 'Video'. A blue box highlights the 'Output channel' icon, with a circled '1' and an arrow pointing to it. Below the Instruments panel, the 'LocalNode' panel is visible, showing a tree view of the measurement setup. Under 'DEWE3-A4', the 'TRION-AOUT-8' sub-panel is expanded, showing a list of analog output channels: 'AO 1/1 Sim', 'AO 1/2 Sim', 'AO 1/3 Sim', 'AO 1/4 Sim', 'AO 1/5 Sim', 'AO 1/6 Sim', 'AO 1/7 Sim', and 'AO 1/8 Sim'. A blue box highlights the 'AO 1/3 Sim [V]', 'AO 1/4 Sim [V]', and 'AO 1/5 Sim [V]' channels, with a circled '2' and an arrow pointing to them. Each channel has a 'Channel data live replay' label and a colored square next to it.



DEWETRON

OUTPUT CHANNEL INSTRUMENT PROPERTIES

- ① Load the data file to be replayed
- ② Assign the input channel to the output channel
- ③ Change the output scaling factor (Adjustable by scroll + CTRL on black scale)
- ④ Change the output offset (Adjustable by scroll + CTRL on black scale)
- ⑤ Loop the playback
- ⑥ Use the cursors to replay only a certain data file part
- ⑦ Start / Stop and pause the playback
- ⑧ Playback mode "Replay" is used to play back channels of a previously recorded OXYGEN file. Playback mode "Live" is used to play back scalar channels of the current measurement, no data is displayed in the instrument. In "Live" mode, the instrument is only used to set the channels to be transmitted, which are directly output as AOUT channels.

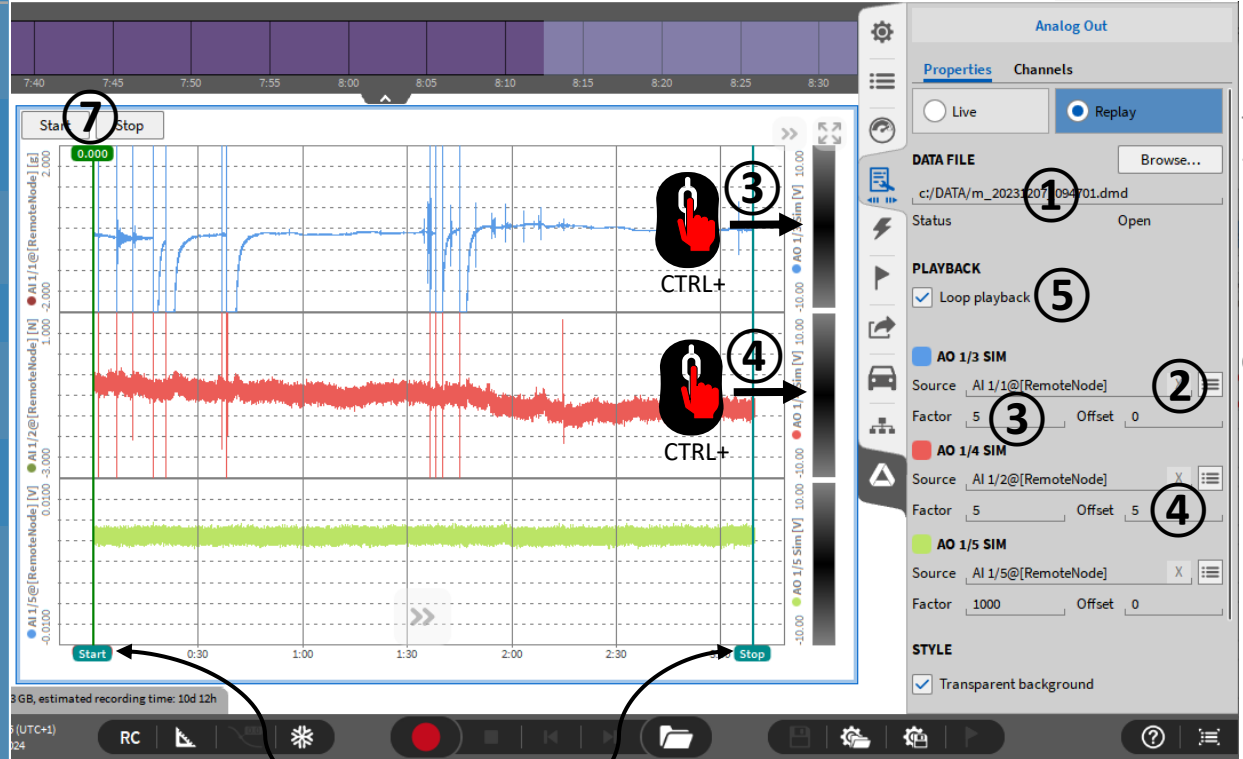

© DEWETRON GmbH | May 24



OUTPUT Mode – Channel Sum

Switch to the „Channel Sum“ Mode.

- ① Select the scaling per analog channel between -10 and 10. The first 8 analog channels can be chosen.
- ② To scale the output as a whole, use the „Output scale“ between -100 and 100.
- ③ To use the average or RMS, switch the „Output value“
- ④ For the two statistic modes „average“ and „RMS“ the window can be set between moving and fixed.

AO 4/1 SN:1234567890 AO 4/1

TRION3-AOUT-8

OUTPUT AMPLIFIER OPTIONS

Mode Channel Sum

Range -10 V .. 10 V

Output mode High Resolution

CHANNEL SUM MODE SETTINGS

AI 1/1 ① 1

AI 1/2 1

AI 1/3 2

AI 1/4 3

AI 3/1 -5

AI 3/2 10

AI 3/3 5

AI 3/4 5

Output scale ② 1

Output value ③ Average

Window type ④ Moving

Average
Actual
Average
RMS

Moving
Moving
Fixed




OUTPUT RATE VS SAMPLE RATE

① The output rate (sample rate of the D/A converter) is only depending on the selected output mode.

High Speed mode corresponds to 2.5 MS/s

High Resolution mode corresponds to 500 kS/s

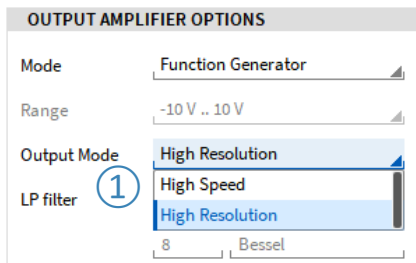

② The output channels can also be stored to the dmd-file. The sample rate for storing the channels can be selected in the *Sample Rate* column of the Channel List

Channel	Color	Active	Stored	Scaled Value	Mode	Sample Rate
LocalNode						
DEWE3-A4						
TRION3-1820-MULTI-8-LoB						
TRION3-AOUT-8						
AO 2/1 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	-0.0000000	AVG	10000 Hz
AO 2/2 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.0406436	AVG	10000 Hz
AO 2/3 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	-5.9999996	AVG	10000 Hz
AO 2/4 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	5.1999997	AVG	10000 Hz
AO 2/5 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	-2.7999998	AVG	10000 Hz
AO 2/6 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	-6.9999996	AVG	10000 Hz
AO 2/7 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.0000000	AVG	10000 Hz
AO 2/8 Sim		<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.0000000	AVG	10000 Hz