


TRION-2402-MULTI



TRION-2402-MULTI

- ▶ Universal analog module
- ▶ Sampling: 24 bit, 200 kS/s per channel
- ▶ Input types: Voltage, bridge, resistance, RTD, IEPE®
- ▶ CAN: Highspeed CAN2.0 port

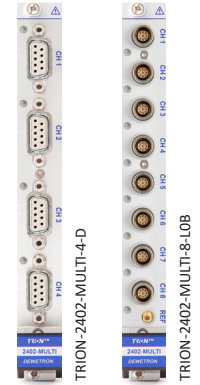

Module specifications

TRION-2402-MULTI specifications		
Input channels	TRION-2402-MULTI-4-D	4 channels D-SUB connector (CH1 can be used as CAN port)
	TRION-2402-MULTI-8-LOB	8 channels 0B LEMO connector (CH1 can be used as CAN port)
ADC		
– Resolution	24 bit	
– Sampling rate	1 kS/s to 200 kS/s per channel	
Input ranges		
– Voltage	± 2 mV to ± 100 V freely programmable	
– IEPE®	± 100 mV to ± 10 V freely programmable	
– Bridge	± 1 to 1000 mV/V	
– Resistance	10, 30, 100, 300 Ω , 1, 3, 10, 30 k Ω	
Accuracy ¹⁾	± 0.02 % of reading ± 0.02 % of range ± 20 μ V	
– Gain drift	Typical 10 ppm/ $^{\circ}$ C max. 20 ppm/ $^{\circ}$ C	
– Offset drift	Typical 0.3 μ V/ $^{\circ}$ C + 10 ppm of range/ $^{\circ}$ C, max 2 μ V/ $^{\circ}$ C + 20 ppm of range/ $^{\circ}$ C	
– Linearity	Typical ± 0.01 %	
Input impedance	0 to 10 V range	100 M Ω
	>10 to 100 V range	2 M Ω
Input bias current	<5 nA	
Input configuration	Single-ended or differential (programmable)	
Input coupling	DC / AC (high pass filter 0.16 Hz)	
Rated input voltage to earth according to EN 61010-2-30	33 V _{RMS} , 46.7 V _{PEAK} , 70 V _{DC}	
Isolation voltage (channel-to-channel and channel-to-chassis)	350 V _{DC}	
Common mode voltage to GND _{isolated}	0 to 10 V range	± 10 V _{DC}
	>10 to 100 V range	± 100 V _{DC}

Tab. 29: Module specifications

TRION-2402-MULTI



TRION-2402-MULTI specifications		
Overvoltage protection	0 to 10 V range	$\pm 50 V_{DC}$ continuous, $100 V_{DC}$ (1 min)
	>10 to 100 V range	$\pm 200 V_{DC}$
Excitation voltage range	0 to $24 V_{DC}$ freely programmable; separately for each channel	
– Resolution	1 mV	
– 1 year accuracy	$\pm 0.03 \% \pm 1.5$ mV	
– Drift	± 10 ppm/ $^{\circ}C$ ± 50 $\mu V/^{\circ}C$	
– Current limit	0.1 to 5 V: 100 mA >5 V to 24 V: limited to 0.5 W	
– Protection	Continuous short	
– Load and line regulation error	$\pm 0.002 \%$ with sense line connected	
Excitation current	0.1 to 60 mADC (programmable, 16-bit DAC)	
– Resolution	1 μA	
– 1 year accuracy	0.1 to 5 mA: $0.05 \% \pm 2$ μA >5 to 60 mA: $2 \% \pm 5$ μA	
– Drift	15 ppm/ $^{\circ}C$	
– Compliance voltage	0.1 to 20 mA: 24 V >20 mA: 10 V	
– Output impedance	>10 M Ω	
Supported sensors	<ul style="list-style-type: none"> ▶ 4-or 6-wire full bridge ▶ 3-or 5-wire $\frac{1}{2}$ bridge with internal completion (software programmable) ▶ 3- or 4-wire $\frac{1}{4}$ bridge with internal resistor for 120 Ω and 350 Ω (software programmable) ▶ 4-wire full bridge with constant current excitation (piezoresistive bridge sensors) 	<ul style="list-style-type: none"> ▶ Potentiometer ▶ Resistance ▶ Resistance temperature detection: Pt100, Pt200, Pt300, Pt500, Pt1000, Pt2000 (2-, 3-, 4-wire) ▶ IEPE[®]
Bridge resistance	80 Ω to 10 k Ω @ $\leq 5 V_{DC}$ excitation	
Shunt calibration	Two internal shunt resistors 50 k Ω and 100 k Ω	
Shunt and completion resistor accuracy	0.05 % ± 15 ppm/K	
Automatic bridge balance	$\pm 400 \%$ of range	
Low pass filter (-3 dB, digital)	1 Hz to 40 % of sample rate freely programmable or OFF	
– Characteristic	Bessel or Butterworth	
– Filter order	2 nd , 4 th , 6 th , 8 th	
– Filter setting AUTO	30 % of sample rate with 8th order Bessel	
Analog anti-aliasing filter	2 nd order Bessel,	
Sample rate > 10 kS/s	250 kHz (-3 dB), 150 kHz (-1 dB)	

Tab. 29: Module specifications

TRION-2402-MULTI



TRION-2402-MULTI specifications																
ADC anti-aliasing filter	-3 dB @ Filter = OFF															
– 1 kS/s ≤ fs ≤ 51.2 kS/s	0.494 fs															
– 51.2 kS/s < fs ≤ 102.4 kS/s	0.49 fs															
– 102.4 kS/s < fs ≤ 200 kS/s	0.38 fs															
	fs = sample frequency															
Typical signal-to-noise ratio, spurious	10 mV range				100 mV range				1 V range				10 V range			
Free SNR, effective number of Bits ²⁾	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise
Sample rate	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]
1 kS/s	82	108	13.3	0.002	101	128	16.5	0.002	111	141	18.1	0.025	112	141	18.3	0.100
10 kS/s	82	108	13.3	0.005	101	123	16.5	0.005	106	134	17.3	0.030	112	140	18.3	0.120
100 kS/s	72	103	11.7	0.015	92	123	15.0	0.016	104	134	17.0	0.058	104	136	17.0	0.210
200 kS/s	69	99	11.2	0.022	88	120	14.3	0.025	88	133	14.3	0.230	96	135	15.7	0.950
200 kS/s; Filter = OFF	69	99	11.2	0.059	80	106	13.0	0.061	81	106	13.2	1.300	81	106	13.2	5.400
Typical THD	-100 dB															
Typical crosstalk	-125 dB (10 V range; 0 to 1 kHz)															
Typical CMRR	110 dB @ 50 Hz, 90 dB @ 1 kHz, 80 dB @ 10 kHz															
Self test (self calibration)	Each channel is able to perform a complex self test by using internal high precision references															
Channel-to-channel phase mismatch	Typically <60 ns between channels using the same range															
CAN specification	CAN 2.0															
CAN physical layer	Highspeed															
CAN termination	Programmable: high impedance or 120 Ω															
Bus fault pin protection	±36 V _{DC}															
Input connector	9-pin LEMO EPG.0B.309, 9-pin D-SUB connector															
REF connector	SMB															
Supported MSI	MSI-BR-TH-x, MSI-BR-CH-x, MSI2-TH-x, MSI2-CH-x, MSI2-LVDT															
Power consumption	TRION-2402-MULTI-4-D								Typ. 8 W, max. 13 W							
	TRION-2402-MULTI-8-L0B								Typ. 13 W, max. 23 W							
	– Voltage mode, no excitation								10.5 W							
	– IEPE [®] mode (4 mA / 8 mA)								13.5 W / 14.5 W							
	– Loop powered sensor (24 V, 20 mA)								18 W							
	– 350 Ω full bridge (5 V / 10 V)								13 W / 16 W							
– PT100, PT1000								13 W								

Tab. 29: Module specifications

1) 1 year accuracy 23 °C ±5 °C

2) LP Filter in auto mode

3) SFDR excluding harmonics

4) ENOB calculated from SNR