


TRION-2402-MULTI



- ▶ Universal analog module
- ▶ Sampling: 24 bit, 200 kS/s per channel
- ▶ Input types: Voltage, bridge, resistance, RTD, IEPE®
- ▶ CAN: High-speed CAN2.0 port

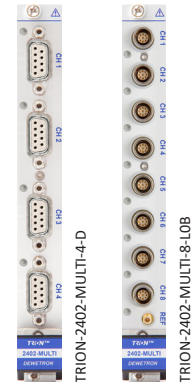

Module specifications

TRION-2402-MULTI specifications		
Input channels	TRION-2402-MULTI-4-D	4 channels D-SUB connector (CH1 can be used as CAN port)
	TRION-2402-MULTI-8-LOB	8 channels 0B LEMO connector (CH1 can be used as CAN port)
ADC		
– Resolution	24 bit	
– Sampling rate	1 kS/s to 200 kS/s per channel	
Input ranges		
– Voltage	±2 mV to ±100 V freely programmable	
– IEPE®	±100 mV to ±10 V freely programmable	
– Bridge	±1 to 1000 mV/V	
– Resistance	10 Ω, 30 Ω, 100 Ω, 300 Ω, 1 kΩ, 3 kΩ, 10 kΩ, 30 kΩ	
Accuracy ¹⁾	±0.02 % of reading ± 0.02 % of range ±20 μV	
– Gain drift	Typical 10 ppm/°C max. 20 ppm/°C	
– Offset drift	Typical 0.3 μV/°C + 10 ppm of range/°C, max 2 μV/°C + 20 ppm of range/°C	
– Linearity	Typical ±0.01 %	
Input impedance	0 to 10 V range	100 MΩ
	>10 to 100 V range	2 MΩ
Input bias current	<5 nA	
Input configuration	Single-ended or differential (programmable)	
Input coupling	DC / AC (high pass filter 0.16 Hz)	
Rated input voltage to earth according to EN 61010-2-30	33 V _{RMS} , 46.7 V _{PEAK} , 70 V _{DC}	
Isolation voltage (channel-to-channel and channel-to-chassis)	350 V _{DC}	
Common mode voltage to GND _{isolated}	0 to 10 V range	±10 V _{DC}
	>10 to 100 V range	±100 V _{DC}
Overvoltage protection	0 to 10 V range	±50 V _{DC} continuous, 100 V _{DC} (1 min)
	>10 to 100 V range	±200 V _{DC}

Tab. 30: Module specifications

TRION-2402-MULTI specifications	
Excitation voltage range – Resolution – 1 year accuracy – Drift – Current limit – Protection – Load and line regulation error	0 to 24 V _{DC} freely programmable; separately for each channel 1 mV ±0.03 % ±1.5 mV ±10 ppm/°C ±50 µV/°C 0.1 to 5 V: 100 mA >5 V to 24 V: limited to 0.5 W Continuous short ±0.002 % with sense line connected
Excitation current – Resolution – 1 year accuracy – Drift – Compliance voltage – Output impedance	0.1 to 60 mADC (programmable, 16-bit DAC) 1 µA 0.1 to 5 mA: 0.05 % ±2 µA >5 to 60 mA: 2 % ±5 µA 15 ppm/°C 0.1 to 20 mA: 24 V >20 mA: 10 V >10 MΩ
Supported sensors	<ul style="list-style-type: none"> ▶ 4-or 6-wire full bridge ▶ 3-or 5-wire ½ bridge with internal completion (software programmable) ▶ 3- or 4-wire ¼ bridge with internal resistor for 120 Ω and 350 Ω (software programmable) ▶ 4-wire full bridge with constant current excitation (piezoresistive bridge sensors) ▶ Potentiometer ▶ Resistance ▶ Resistance temperature detection: Pt100, Pt200, Pt300, Pt500, Pt1000, Pt2000 (2-, 3-, 4-wire) ▶ IEPE®
Bridge resistance	80 Ω to 10 kΩ @ ≤5 V _{DC} excitation
Shunt calibration	Two internal shunt resistors 50 kΩ and 100 kΩ
Shunt and completion resistor accuracy	0.05 % ±15 ppm/K
Automatic bridge balance	±400 % of range
Low pass filter (-3 dB, digital) – Characteristic – Filter order – Filter setting AUTO	1 Hz to 40 % of sample rate freely programmable or OFF Bessel or Butterworth 2 nd , 4 th , 6 th , 8 th 30 % of sample rate with 8th order Bessel
Analog anti-aliasing filter Sample rate > 10 kS/s	2 nd order Bessel, 250 kHz (-3 dB), 150 kHz (-1 dB)
ADC anti-aliasing filter – 1 kS/s ≤ fs ≤ 51.2 kS/s – 51.2 kS/s < fs ≤ 102.4 kS/s – 102.4 kS/s < fs ≤ 200 kS/s	-3 dB @ Filter = OFF 0.494 fs 0.49 fs 0.38 fs

fs = sample frequency

Tab. 30: Module specifications

TRION-2402-MULTI specifications																
Typical signal-to-noise ratio, spurious Free SNR, effective number of Bits ²⁾	10 mV range				100 mV range				1 V range				10 V range			
	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise
Sample rate	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]
1 kS/s	82	108	13.3	0.002	101	128	16.5	0.002	111	141	18.1	0.025	112	141	18.3	0.100
10 kS/s	82	108	13.3	0.005	101	123	16.5	0.005	106	134	17.3	0.030	112	140	18.3	0.120
100 kS/s	72	103	11.7	0.015	92	123	15.0	0.016	104	134	17.0	0.058	104	136	17.0	0.210
200 kS/s	69	99	11.2	0.022	88	120	14.3	0.025	88	133	14.3	0.230	96	135	15.7	0.950
200 kS/s; Filter = OFF	69	99	11.2	0.059	80	106	13.0	0.061	81	106	13.2	1.300	81	106	13.2	5.400
Typical THD	-100 dB															
Typical crosstalk	-125 dB (10 V range; 0 to 1 kHz)															
Typical CMRR	110 dB @ 50 Hz, 90 dB @ 1 kHz, 80 dB @ 10 kHz															
Self test (self calibration)	Each channel is able to perform a complex self test by using internal high precision references															
Channel-to-channel phase mismatch	Typically <60 ns between channels using the same range															
CAN specification	CAN 2.0															
CAN physical layer	High-speed															
CAN termination	Programmable: high impedance or 120 Ω															
Bus fault pin protection	±36 V _{DC}															
Input connector	9-pin LEMO EPG.0B.309, 9-pin D-SUB connector															
REF connector	SMB															
Supported MSI	MSI-BR-TH-x, MSI-BR-CH-x, MSI2-TH-x, MSI2-CH-x, MSI2-LVDT															
Power consumption	TRION-2402-MULTI-4-D								Typ. 8 W, max. 13 W							
	TRION-2402-MULTI-8-LOB								Typ. 13 W, max. 23 W							
	– Voltage mode, no excitation								10.5 W							
	– IEPE® mode (4 mA / 8 mA)								13.5 W / 14.5 W							
	– Loop powered sensor (24 V, 20 mA)								18 W							
– 350 Ω full bridge (5 V / 10 V)								13 W / 16 W								
– PT100, PT1000								13 W								

Tab. 30: Module specifications

1) 1 year accuracy 23 °C ±5 °C

2) LP Filter in auto mode

3) SFDR excluding harmonics

4) ENOB calculated from SNR