

TRION SUB-MODULES

In combination with the [TRION\(3\)-18xx-POWER-4](#), [TRION\(3\)-1810-HV-8](#) and [TRION3-1810x-SUB-8](#) boards, the interchangeable TRION sub-modules can be used to create individual input configurations.



TRION sub-modules overview

The following sections provide an overview and detailed information on the TRION sub-modules. The values given below were determined in a standardized test setting¹⁾.

Type	Range	Bandwidth	Isolated
TRION-SUB-600V	600 V _{RMS} (± 1500 V _{PEAK})	300 kHz	Yes
TRION-SUB-5V	5 V _{RMS} (± 10 V _{PEAK})	300 kHz	Yes
TRION-SUB-XV	600 V _{RMS} (± 1000 V) ²⁾ 60 V _{RMS} (± 100 V) 6 V _{RMS} (± 10 V) 0.6 V _{RMS} (± 1 V)	300 kHz	Yes
TRION-POWER-SUB-CUR-20A-1B	20 A _{RMS} (± 40 A _{PEAK})	300 kHz	Yes
TRION-POWER-SUB-CUR-2A-1B	2 A _{RMS} (± 4 A _{PEAK})	300 kHz	Yes
TRION-POWER-SUB-CUR-1A-1B	1 A _{RMS} (± 2 A _{PEAK})	300 kHz	Yes
TRION-POWER-SUB-CUR-02A-1B	0.2 A _{RMS} (± 0.4 A _{PEAK})	300 kHz	Yes
TRION-POWER-SUB-dLV-5V	5 V _{RMS} (± 10 V _{PEAK})	5 MHz	No
TRION-POWER-SUB-dLV-1V	1 V _{RMS} (± 2 V _{PEAK})	5 MHz	No
TRION-POWER-SUB-CT	1 A _{RMS} (± 2 A _{PEAK}) 0.5 A _{RMS} (± 1 A _{PEAK}) 0.25 A _{RMS} (± 0.5 A _{PEAK}) 0.1 A _{RMS} (± 0.2 A _{PEAK})	5 MHz	No
TRION-POWER-SUB-dLV-1 ³⁾	5 V _{RMS} (± 10 V _{PEAK})	100 kHz	No

Tab. 81: TRION sub-modules overview

1) The following accuracy conditions were applied: Temperature: 23 \pm 5 °C; humidity: 40 to 60 % rel. humidity; input waveform: sine wave; common mode voltage: 0 V; line filter: Auto; sample rate: 1 MS/s; resolution: 24 bit; power factor: 1; after warm-up; after zero level, accuracy: Frequency (f) in [kHz] (12-month accuracy \pm reading error and range error)

2) Max. allowed input: 600 V CAT II (850 V_{PEAK}).

3) Not supported by TRION3-18xx-SUB-8 module.




TRION-SUB-600V

TRION-SUB-600V				
Input range	600 V _{RMS} (± 1500 V _{PEAK}) CF=2.5			
Resolution	20 bit			
1 year accuracy (23 °C \pm 5 °C)	DC	± 0.02 % of reading ± 0.005 % of range		
	0.5 Hz to 10 kHz	± 0.03 % of reading		
	10 kHz to 100 kHz	$\pm (0.015$ % * f) of reading		f: frequency in kHz
	100 kHz to 200 kHz	$\pm (0.04$ % * f) of reading		f: frequency in kHz
Gain drift	20 ppm / °C			
Offset drift	1 mV / °C			
Typical THD	-105 dB			
Typical CMRR	>100 dB @ 50 Hz; >90 dB @ 1 kHz; >70 dB @ 10 kHz; >50 dB @ 100 kHz			
Bandwidth (-3 dB)	300 kHz			
Rated input voltage to earth according to EN 61010-2-30	300 V CAT III / 600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min); 35 kV/ μ s transient immunity			
Common mode voltage	600 V _{RMS}			
Overvoltage protection	1500 V _{PEAK} or 1000 V _{RMS} (1 min)			
Input impedance	5 M Ω ; 3.5 pF			
Isolation (earth) resistance	100 G Ω ; 4 pF (IN- to GND)			
Connector	Safety banana sockets			
	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[mV]
0.1 kS/s	125	140	20.4	2.0
1 kS/s	120	140	19.6	3.2
10 kS/s	111	140	18.2	5.4
100 kS/s	104	140	16.9	35.0
1000 kS/s	93	128	15.1	150.0
2000 kS/s	93	126	15.1	151.0

Tab. 82: TRION-SUB-600V

1) SFDR excluding harmonics

2) ENOB calculated from SNR



WARNING



Risk of injury due to electric shock

Voltage measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.





TRION-SUB-5V

TRION-SUB-5V				
Input range	5 V _{RMS} (±10 V _{PEAK}) CF=2			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C)	DC	±0.02 % of reading ±0.005 % of range		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 100 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	100 kHz to 200 kHz	±(0.04 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm / °C			
Offset drift	1 µV / °C			
Typical THD	-102 dB			
Typical CMRR	>140 dB @ 50 Hz; >106 dB @ 10 kHz; >102 dB @ 100 kHz			
Bandwidth (-3 dB)	300 kHz			
Rated input voltage to earth according to EN 61010-2-30	300 V CAT III / 600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min); 35 kV/µs transient immunity			
Common mode voltage	600 V _{RMS}			
Overvoltage protection	1000 V _{PEAK} or 600 V _{RMS} (1 min)			
Input impedance	5 MΩ; 22 pF			
Isolation (earth) resistance	100 GΩ; 4 pF (IN- to GND)			
Connector	Safety banana sockets			
	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[µV]
0.1 kS/s	134	145	22.0	5
1 kS/s	126	148	20.6	14
10 kS/s	118	145	19.4	44
100 kS/s	109	138	17.8	155
1000 kS/s	98	135	16.1	596
2000 kS/s	98	132	16.1	598

Tab. 83: TRION-SUB-5V

1) SFDR excluding harmonics

2) ENOB calculated from SNR

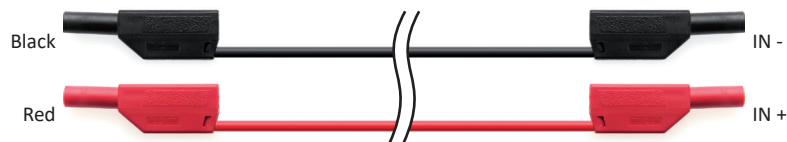

WARNING



Risk of injury due to electric shock

Voltage measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.



TRION-SUB-XV



TRION-SUB-XV																
Input range	600 V _{RMS} (±1000 V) ¹⁾				60 V _{RMS} (±100 V)				6 V _{RMS} (±10 V)				0.6 V _{RMS} (±1 V)			
Resolution	16-bit															
1 year accuracy (23 °C ±5 °C)	DC (600 V, 60 V range)				±0.03 % of reading ±0.01 % of range											
	DC (6 V range)				±0.02 % of reading ±0.01 % of range											
	DC (0.6 V range)				±0.02 % of reading ±150 µV											
	0.5 Hz to 500 Hz				±0.03 % of reading											
	>500 Hz to 100 kHz				±(0.06 % * f) of reading											
Gain drift	25 ppm / °C															
Offset drift	2 µV / °C															
Typical THD	-90 dB															
Typical CMRR	≤6 V range: >140 dB @ 50 Hz; >125 dB @ 1 kHz; >115 dB @ 10 kHz; >94 dB @ 100 kHz															
	>6 V range: >100 dB @ 50 Hz; >90 dB @ 1 kHz; >70 dB @ 10 kHz; >50 dB @ 100 kHz															
Bandwidth (-3 dB)	300 kHz															
Rated input voltage to earth acc. to EN 61010-2-30	300 V CAT III / 600 V CAT II															
Isolation voltage	3750 V _{RMS} (1 min); 35 kV/µs transient immunity															
Common mode voltage	600 V _{RMS}															
Overvoltage protection	1000 V _{PEAK} or 600 V _{RMS}															
Input impedance	10 MΩ; t.b.d. pF															
Isolation (earth) resistance	100 GΩ; 4 pF (IN- to GND)															
Connector	Safety banana sockets															
	0.6 V				6 V				60 V				600 V			
	SNR	SFDR ¹⁾	ENOB ²⁾	Noise	SNR	SFDR ¹⁾	ENOB ²⁾	Noise	SNR	SFDR ¹⁾	ENOB ²⁾	Noise	SNR	SFDR ¹⁾	ENOB ²⁾	Noise
Sample rate	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]	[dB]	[dB]	[Bit]	[mV _{pp}]
0.1 kS/s	111.0	t.b.d	18.1	0.0	120.1	t.b.d	19.7	0.0	120.1	t.b.d	19.7	0.0	100.1	t.b.d	16.3	3.5
1 kS/s	109.4	t.b.d	17.9	0.1	111.0	t.b.d	18.1	0.1	111.0	t.b.d	18.1	0.1	113.5	t.b.d	18.6	9.0
10 kS/s	101.4	t.b.d	16.6	0.1	84.3	t.b.d	13.7	0.4	84.3	t.b.d	13.7	0.4	104.9	t.b.d	17.1	34.0
100 kS/s	92.9	t.b.d	15.1	0.3	94.7	t.b.d	15.4	1.1	94.7	t.b.d	15.4	1.1	95.2	t.b.d	15.5	110.0
300 kS/s	87.7	122.0	14.3	0.5	89.4	122.0	14.6	2.4	89.4	122.0	14.6	2.4	89.9	122.0	14.6	220.0
1 MS/s	83.4	122.0	13.6	1.3	82.3	t.b.d	13.4	4.7	82.3	t.b.d	13.4	4.7	83.0	122.0	13.5	470.0

Tab. 84: TRION-SUB-XV

1) Max. allowed input 600 V CAT II (850 V_{PEAK})

2) SFDR excluding harmonics

3) ENOB calculated from SNR

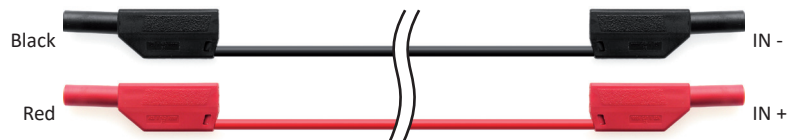

WARNING



Risk of injury due to electric shock

Voltage measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.







TRION-POWER-SUB-CUR-20A-1B

TRION-POWER-SUB-CUR-20A-1B				
Range	20 A _{RMS} (±40 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾²⁾	DC	±0.02 % of reading ±0.02 % of range ³⁾		
	0.5 Hz to 1 kHz	±0.03 % of reading		
	1 kHz to 5 kHz	±0.15 % of reading		
	5 kHz to 10 kHz	±0.35 % of reading		
	10 kHz to 50 kHz	±(0.3 % + 0.05 % * f) of reading	f: frequency in kHz	
50 kHz to 300 kHz	±(0.10 % * f) of reading	f: frequency in kHz		
Gain drift	20 ppm/°C			
Offset drift	0.35 mA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/μs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	50 A _{PEAK} or 40 A _{RMS} (1 s)			
Thermal current limit	20 A _{RMS}			
Input resistance	2 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits ⁴⁾				
	SNR	SFDR ⁵⁾	ENOB ⁶⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[mA]
0.1 kS/s	101	117	16.5	0.8
1 kS/s	100	119	16.3	1.4
10 kS/s	98	113	16.0	2.1
100 kS/s	93	110	15.2	3.9
1000 kS/s	85	110	13.8	10.3
2000 kS/s	84	107	13.7	10.9

Tab. 85: TRION-POWER-SUB-CUR-20A-1B

- 1) For self-generated heat caused by current input, add $0.00015 \times I^2$ % of reading + $20 \times I^2 \mu A$ to the current accuracy. 'I' is the current reading [A]. The influence from self-generated heat continues until the temperature of the shunt resistor inside the DEWE2-Chassis lowers even if the current input changes to a small value.
- 2) Below 1 % of range, add 10 ppm of range
- 3) Add 0.03 % of range with no zero level.
- 4) LP filter in auto mode
- 5) SFDR excluding harmonics
- 6) ENOB calculated from SNR

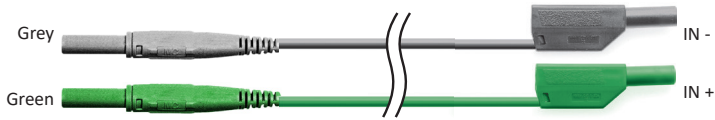

WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.

WARNING



Risk of injury due to heat or fire

Always use the dedicated measurement leads which come with your module, or appropriate measurement leads, which are rated for at least 20 A continuous current.




TRION-POWER-SUB-CUR-2A-1B

TRION-POWER-SUB-CUR-2A-1B				
Range	2 A _{RMS} (±4 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±0.02 % of range ²⁾		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 30 kHz	±0.1 % of reading		
	30 kHz to 200 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	200 kHz to 300 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm/°C			
Offset drift	15 µA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/µs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	10 A _{PEAK} or 5 A _{RMS} (1 s)			
Thermal current limit	3 A _{RMS}			
Input resistance	50 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits³⁾				
	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[µA]
0.1 kS/s	110	125	18.0	34.8
1 kS/s	107	126	17.5	47.2
10 kS/s	105	122	17.1	78.2
100 kS/s	100	120	16.3	172.6
1000 kS/s	91	114	14.8	541.2
2000 kS/s	90	114	14.7	553.1

Tab. 86: TRION-POWER-SUB-CUR-2A-1B

- 1) Below 1 % of range, add 25 ppm of range
- 2) Add 0.03 % of range with no zero level.
- 3) LP filter in auto mode
- 4) SFDR excluding harmonics
- 5) ENOB calculated from SNR

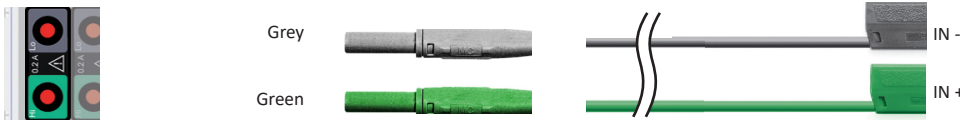

WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.




TRION-POWER-SUB-CUR-1A-1B

TRION-POWER-SUB-CUR-1A-1B					
Range	1 A _{RMS} (±2 A _{PEAK})				
Resolution	20 bit				
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±80 µA ²⁾			
	0.5 Hz to 10 kHz	±0.03 % of reading			
	10 kHz to 30 kHz	±0.1 % of reading			
	30 kHz to 200 kHz	±(0.015 % * f) of reading	f: frequency in kHz		
	200 kHz to 300 kHz	±(0.1 % * f) of reading	f: frequency in kHz		
Gain drift	20 ppm/°C				
Offset drift	4 µA/°C				
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II				
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/µs transient immunity				
Bandwidth	300 kHz				
Connector	Safety banana plugs				
Overcurrent protection	4 A _{PEAK} or 2 A _{RMS} (1 s)				
Thermal current limit	1 A _{RMS}				
Input resistance	500 mΩ				
Typical signal to noise ratio, spurious free SNR, effective number of bits ³⁾					
		SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
	Sample rate	[dB]	[dB]	[Bit]	[µA]
	0.1 kS/s	131	149	21.5	1.4
	1 kS/s	125	149	20.5	3.9
	10 kS/s	116	144	19.0	12.6
	100 kS/s	106	137	17.3	47.0
	1000 kS/s	96	134	15.7	161.0
	2000 kS/s	95	130	15.5	162.0

Tab. 87: TRION-POWER-SUB-CUR-1A-1B

- 1) Below 1 % of range, add 25 ppm of range
- 2) Add 0.03 % of range with no zero level.
- 3) LP filter in auto mode
- 4) SFDR excluding harmonics
- 5) ENOB calculated from SNR

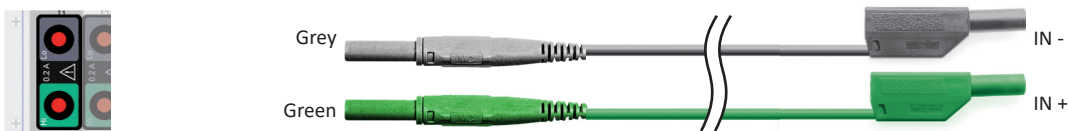

WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.




TRION-POWER-SUB-CUR-02A-1B

TRION-POWER-SUB-CUR-02A-1B				
Range	0.2 A _{RMS} (±0.4 A _{PEAK})			
Resolution	20 bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±0.02 % of range ²⁾		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 30 kHz	±0.1 % of reading		
	30 kHz to 200 kHz	±(0.015 % * f) of reading	f: frequency in kHz	
	200 kHz to 300 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Gain drift	20 ppm/°C			
Offset drift	4 µA/°C			
Rated input voltage to earth according to EN 61010-2-30	600 V CAT II			
Isolation voltage	3750 V _{RMS} (1 min), 35 kV/µs transient immunity			
Bandwidth	300 kHz			
Connector	Safety banana plugs			
Overcurrent protection	2 A _{PEAK} or 1 A _{RMS} (1 s)			
Thermal current limit	0.5 A _{RMS}			
Input resistance	500 mΩ			
Typical signal to noise ratio, spurious free SNR, effective number of bits ³⁾				
	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[µA]
0.1 kS/s	108	128	17.6	3.6
1 kS/s	107	123	17.5	5.6
10 kS/s	104	121	17.0	9.2
100 kS/s	99	114	16.2	17.3
1000 kS/s	91	114	14.8	51.3
2000 kS/s	90	114	14.7	54.9

Tab. 88: TRION-POWER-SUB-CUR-02A-1B

- 1) Below 1 % of range, add 25 ppm of range
- 2) Add 0.03 % of range with no zero level.
- 3) LP filter in auto mode
- 4) SFDR excluding harmonics
- 5) ENOB calculated from SNR

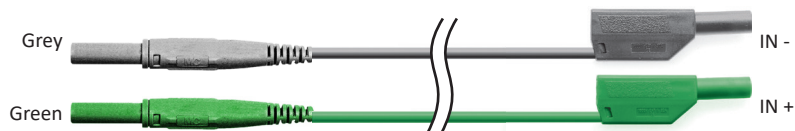

WARNING



Risk of injury due to electric shock

Current measurement on lines above 33 V_{RMS}, 46.7 V_{PEAK} or 70 V_{DC} is only permitted with rated safety test leads.





TRION-POWER-SUB-dLV-1V

TRION-POWER-SUB-dLV-1V				
Range	1 V _{RMS} (±2 V _{PEAK}) NOT ISOLATED ⚠			
Sampling rate / resolution	TRION(3)-1810-HV	100 S/s to 1 MS/s	24-bit	
	TRION3-1810-SUB-8	100 S/s to 1 MS/s	24-bit	
	TRION(3)-1820-POWER	100 S/s to 2 MS/s	24-bit	
	TRION3-1810M-POWER	100 S/s to 2 MS/s	24-bit	
>2 MS/s to 10 MS/s		18-bit		
1 year accuracy (23 °C ±5 °C)	DC	±0.015 % of reading ±200 µV		
	0.5 Hz to 10 kHz	±0.03 % of reading		
	10 kHz to 500 kHz	±(0.006 % * f) of reading	f: frequency in kHz	
	500 kHz to 3000 kHz	±(0.006 % * f) of reading	f: frequency in kHz	
Gain drift	10 ppm / °C			
Offset drift	10 µV / °C			
Typical THD	-100 dB			
Typical CMRR	>70 dB @ 50 Hz; >65 dB @ 10 kHz; >45 dB @ 100 kHz			
Bandwidth (-3 dB)	5 MHz			
Isolation voltage	None. Use with isolated current transducer.			
Common mode voltage	±10 V _{DC}			
Oversvoltage protection	±300 V _{DC}			
Connector	D-SUB-9			
Input impedance	5 MΩ, differential 5 MΩ, 15 pF			
Sensor supply (±9 V)	Max. 40 mA			
Sample rate	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}
	[dB]	[dB]	[Bit]	[µV]
0.1 kS/s	120	133	19.6	4.8
1 kS/s	117	130	19.2	6.3
10 kS/s	111	129	18.2	16.0
100 kS/s	104	129	17.1	49.0
1000 kS/s	95	129	15.5	162.0
2000 kS/s	92	129	15.0	243.0

Tab. 90: TRION-POWER-SUB-dLV-1V

1) SFDR excluding harmonics

2) ENOB calculated from SNR



- Pin 1: TEDS
- Pin 2: IN+
- Pin 3: n.c.
- Pin 4: GND (not isolated)
- Pin 5: +9 V (40 mA max.)
- Pin 6: n.c.
- Pin 7: IN-
- Pin 8: n.c.
- Pin 9: -9 V (40 mA max.)

WARNING



Risk of injury due to electric shock
 TRION-POWER-SUB-dLV-xV modules are not isolated.





TRION-POWER-SUB-dLV-5V

TRION-POWER-SUB-dLV-5V					
Range	5 V _{RMS} (± 10 V _{PEAK}) NOT ISOLATED ⚠				
Sampling rate / resolution	TRION(3)-1810-HV	100 S/s to 1 MS/s	24-bit		
	TRION3-1810-SUB-8	100 S/s to 1 MS/s	24-bit		
	TRION(3)-1820-POWER	100 S/s to 2 MS/s	24-bit		
	TRION3-1810M-POWER	100 S/s to 2 MS/s	24-bit		
		>2 MS/s to 10 MS/s	18-bit		
1 year accuracy (23 °C \pm 5 °C)	DC	± 0.015 % of reading ± 200 μ V			
	0.5 Hz to 10 kHz	± 0.03 % of reading			
	10 kHz to 500 kHz	$\pm(0.006$ % * f) of reading	f: frequency in kHz		
	500 kHz to 3000 kHz	$\pm(0.006$ % * f) of reading	f: frequency in kHz		
Gain drift	10 ppm / °C				
Offset drift	10 μ V / °C				
Typical THD	-100 dB				
Typical CMRR	>70 dB @ 50 Hz; >65 dB @ 10 kHz; >45 dB @ 100 kHz				
Bandwidth (-3 dB)	5 MHz				
Isolation voltage	None. Use with isolated current transducer.				
Common mode voltage	± 10 V _{DC}				
Overvoltage protection	± 300 V _{DC}				
Connector	D-SUB-9				
Input impedance	5 M Ω , differential 5 M Ω , 15 pF				
Sensor supply (± 9 V)	Max. 40 mA				
Sample rate	SNR	SFDR ¹⁾	ENOB ²⁾	Noise _{pp}	
	[dB]	[dB]	[Bit]	[μ V]	
	0.1 kS/s	125	138	20.5	13
	1 kS/s	122	135	20.0	21
	10 kS/s	116	134	19.0	54
	100 kS/s	108	134	17.7	152
	1000 kS/s	99	134	16.2	489
	2000 kS/s	96	134	15.7	712

Tab. 89: TRION-POWER-SUB-dLV-5V

1) SFDR excluding harmonics

2) ENOB calculated from SNR



- Pin 1: TEDS
- Pin 2: IN+
- Pin 3: n.c.
- Pin 4: GND (not isolated)
- Pin 5: +9 V (40 mA max.)
- Pin 6: n.c.
- Pin 7: IN-
- Pin 8: n.c.
- Pin 9: -9 V (40 mA max.)

WARNING



Risk of injury due to electric shock
 TRION-POWER-SUB-dLV-xV modules are not isolated.





TRION-POWER-SUB-dLV-1

TRION-POWER-SUB-dLV-1				
Range	5 V _{RMS} (±10 V _{PEAK}) NOT ISOLATED ⚠			
Resolution	18-bit			
1 year accuracy (23 °C ±5 °C) ¹⁾	DC	±0.02 % of reading ±0.02 % of range		
	0.5 Hz to 5 kHz	±0.03 % of reading		
	5 kHz to 30 kHz	±(0.01 % * f) of reading	f: frequency in kHz	
	30 kHz to 50 kHz	±(0.02 % * f) of reading	f: frequency in kHz	
	50 kHz to 100 kHz	±(0.1 % * f) of reading	f: frequency in kHz	
Typical THD	-100 dB			
Typical CMRR	>70 dB @ 50 Hz; >65 dB @ 10 kHz; >45 dB @ 100 kHz			
Isolation voltage	None. Use with isolated current transducer.			
Overvoltage protection	±30 V _{DC}			
Bandwidth	100 kHz			
Connector	D-SUB-9			
Input resistance	1 MΩ			
Sensor supply (±9 V)	Max. 40 mA			
	SNR	SFDR ⁴⁾	ENOB ⁵⁾	Noise _{pp}
Sample rate	[dB]	[dB]	[Bit]	[μV]
0.1 kS/s	129	150	21.1	14.3
1 kS/s	119	142	19.5	45.3
10 kS/s	109	139	17.8	163.3
100 kS/s	99	131	16.2	590.1
1000 kS/s	94	124	15.3	1337.5
2000 kS/s	92	123	15.0	1375.7

Tab. 91: TRION-POWER-SUB-dLV-1

1) Below 1 % of range, add 25 ppm of range

2) Add 0.03 % of range with no zero level.



- Pin 1: TEDS
- Pin 2: IN+
- Pin 3: n.c.
- Pin 4: GND (not isolated)
- Pin 5: +9 V (40 mA max.)
- Pin 6: n.c.
- Pin 7: IN-
- Pin 8: n.c.
- Pin 9: -9 V (40 mA max.)

WARNING



Risk of injury due to electric shock

TRION-POWER-SUB-dLV-1 modules are not isolated.



TRION-POWER-SUB-CT



TRION-POWER-SUB-CT																
Range NOT ISOLATED ⚠	$1 A_{RMS} (\pm 2 A_{PEAK})$ $0.5 A_{RMS} (\pm 1 A_{PEAK})$ $0.25 A_{RMS} (\pm 0.5 A_{PEAK})$ $0.1 A_{RMS} (\pm 0.2 A_{PEAK})$															
Sampling rate/resolution	TRION(3)-1810-HV				100 S/s to 1 MS/s				24-bit							
	TRION3-1810-SUB-8				100 S/s to 1 MS/s				24-bit							
	TRION(3)-1820-POWER				100 S/s to 2 MS/s				24-bit							
	TRION3-1810M-POWER				100 S/s to 2 MS/s				24-bit							
1 year accuracy (23 °C ±5 °C) ¹⁾	DC				±0.02 % of reading ±0.02 % of range (±50 µA without zero)											
	0.5 Hz to 10 kHz				±0.03 % of reading											
	10 kHz to 500 kHz				±(0.006 % * f) of reading								f: frequency in kHz			
	500 kHz to 3000 kHz				±(0.006 % * f) of reading								f: frequency in kHz			
Gain drift	Typ. 10 ppm/°C; max: 20 ppm/°C															
Offset drift	Typ. 0.5 µA/°C; max: 2.5 µA/°C															
Typical THD	-95 dB															
Typical CMRR	>100 dB @ 50 Hz; 100 dB @ 1 kHz; 95 dB @ 10 kHz; 70 dB @ 100 kHz															
Bandwidth (-3 dB)	5 MHz															
Isolation voltage	None. Only use with isolated current sensors complying with the required safety category.															
Common mode voltage	±10 V															
Overcurrent protection	±1.3 A _{RMS} continuously; 4 A _{PEAK} or 2 A _{RMS} (1 s)															
Input resistance	500 mΩ															
Connector	D-SUB-9															
Mating cable	ADAP-DB9M-DB9F-POW															
Supported current transducer	PA-IT-xxx-S or PA-IN-xxx-S series															
Transducer supply	Requires clamp supply: DEWE3-PA8 series; DW2-CLAMP-DC-POWER-8 (Clamp Supply Box)															
Sensor supply (±9 V)	Max. 40 mA															
Typical signal to noise ratio, spurious free SNR, effective number of bits²⁾																
	0.1 A				0.25 A				0.5 A				1 A			
	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise	SNR	SFDR ³⁾	ENOB ⁴⁾	Noise
Sample rate	[dB]	[dB]	[Bit]	[µA _{pp}]	[dB]	[dB]	[Bit]	[µA _{pp}]	[dB]	[dB]	[Bit]	[µA _{pp}]	[dB]	[dB]	[Bit]	[µA _{pp}]
0.1 kS/s	114	129	18.6	1.0	122	137	20.0	1.0	118	136	19.3	2	124	142	20.4	2.4
1 kS/s	107	132	17.5	2.7	115	140	18.8	2.7	114	139	18.6	6	120	145	19.6	6.4
10 kS/s	98	127	16.0	9.1	106	135	17.4	9.1	106	131	17.3	19	112	137	18.3	19
100 kS/s	89	119	14.5	33	97	127	15.8	33	96	127	15.7	68	102	133	16.7	68
1 MS/s	79	114	12.8	115	87	122	14.1	115	86	122	14.0	248	92	128	15.0	248
2 MS/s	76	111	12.3	166	83	119	13.6	382	83	119	13.5	824	82	125	14.5	824
5 MS/s	72	108	11.7	274	80	116	12.9	274	79	116	12.8	558	85	122	13.9	558
10 MS/s	69	105	11.2	382	77	113	12.5	382	76	112	12.3	824	82	118	13.4	824

Tab. 92: TRION-POWER-SUB-CT

TRION SUB-MODULES

- 1) Below 1 % of range, add 25 ppm of range
- 2) LP Filter in auto mode

- 3) SFDR excluding harmonics
- 4) ENOB calculated from SNR



Pin 1:	TEDS	Pin 6:	n.c.
Pin 2:	IN+	Pin 7:	IN-
Pin 3:	n.c.	Pin 8:	n.c.
Pin 4:	GND (not isolated)	Pin 9:	n.c.
Pin 5:	n.c.		

WARNING



Risk of injury due to electric shock

TRION-POWER-SUB-CT modules are not isolated. Use with isolated current transducer only.



INFORMATION

The TRION3-1810M-SUB-8 is mainly recommended for the use with TRION-SUB-CT, TRION-POWER-SUB-dLV-1V and TRION-POWER-SUB-dLV-5V to benefit from the full bandwidth of these sub-modules.