


TRION-2402-dSTG



- ▶ Differential universal input module
- ▶ Sampling: 24 bit, 200 kS/s per channel
- ▶ Input types
 - Voltage
 - Strain gauge, bridge sensor, piezo-resistive bridge
 - IEPE®
 - Resistance, potentiometer

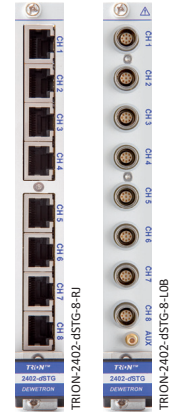

Module specifications

TRION-2402-dSTG specifications		
Input channels	TRION-2402-dSTG-8-RJ	8 channels using RJ-45 sockets
	TRION-2402-dSTG-8-LOB	8 channels using LEMO 0B sockets
Sampling rate	200 kS/s channel	
Resolution	24 bit	
Input ranges	<ul style="list-style-type: none"> – Voltage: ± 10 mV, 30 mV, 100 mV, 300 mV, 1 V, 3 V, 10 V – Bridge: 1, 3, 10, 30, 100, 300, 1000 mV/V or mV/mA – IEPE®: ± 100 mV, 300 mV, 1 V, 3 V, 10 V – Resistance: 10 Ω, 30 Ω, 100 Ω, 300 Ω, 1 kΩ, 3 kΩ, 10 kΩ, 30 kΩ – Current: Depending on external shunt 	
Voltage input accuracy ¹⁾	± 0.02 % of reading ± 0.02 % of range ± 20 μ V	
– Gain drift	Typical 10 ppm/ $^{\circ}$ C max. 20 ppm/ $^{\circ}$ C	
– Offset drift	Typical 0.3 μ V/ $^{\circ}$ C + 10 ppm of range/ $^{\circ}$ C, max 2 μ V/ $^{\circ}$ C + 20 ppm of range/ $^{\circ}$ C	
– Linearity	Typical ± 0.01 %	
Input impedance	100 M Ω	
Input bias current	<1 nA	
Input configuration	Single-ended or differential (programmable)	
Input coupling	DC, AC (0.16 Hz, 0.5 Hz, 3.4 Hz, 10 Hz); max. DC voltage when AC coupled: 50 V	
Excitation voltage	0 to 13.5 V _{DC} (programmable, 1 mV steps), 100 mA max. current, max. 8 W per module	
– Accuracy ¹⁾	± 0.03 % ± 1 mV	
– Drift	± 10 ppm/K ± 50 μ V/K	
– Current limit	100 mA	
– Protection	Continuous short to ground	
Excitation current	0.002 to 20 mADC (programmable, 1 μ A steps)	
– Accuracy ¹⁾	0.05% ± 2 μ A	
– Drift	15 ppm/ $^{\circ}$ C	
– Compliance voltage	10 V	
– Output impedance	>10 M Ω	

Tab. 36: Module specifications

TRION-2402-dSTG specifications												
IEPE® excitation	4 mA ±10 %											
– Compliance voltage	22 V											
Supported sensors	4- or 6-wire full bridge 3- or 5-wire ½ bridge with internal completion 3- or 4-wire ¼ bridge with internal resistor for 120 and 350 Ω 4-wire full bridge with constant current excitation (piezo-resistive bridge sensors) Potentiometer; resistance IEPE® (fixed 4 mA excitation)											
Bridge resistance	80 Ω to 10 kΩ @ ≤ 5 V _{DC} excitation											
Shunt calibration	Two internal shunt resistors 50 kΩ and 100 kΩ											
Shunt and completion resistor accuracy	0.05 % ±15 ppm/K											
Automatic bridge balance	250 % of range											
Typical signal-to-noise ratio, spurious	10 mV range			100 mV range			1 V range			10 V range		
Free SNR, effective number of bits ²⁾	SNR	SFDR ³⁾	ENOB ⁴⁾	SNR	SFDR ³⁾	ENOB ⁴⁾	SNR	SFDR ³⁾	ENOB ⁴⁾	SNR	SFDR ³⁾	ENOB ⁴⁾
Sample rate	[dB]	[dB]	[Bit]	[dB]	[dB]	[Bit]	[dB]	[dB]	[Bit]	[dB]	[dB]	[Bit]
1 kS/s	82	108	13.3	101	128	16.5	111	141	18.1	112	141	18.3
10 kS/s	78	106	12.7	98	126	16.0	108	136	17.6	109	138	17.8
100 kS/s	72	103	11.7	92	123	15.0	104	134	17.0	107	136	17.5
200 kS/s	69	99	11.2	80	120 ⁵⁾ /106	13.0	81	133 ⁵⁾ /106	13.2	81	135 ⁵⁾ /106	13.2
Typical THD	-97 dB											
Typical CMRR	100 dB @ 50 Hz; 90 dB @ 1 kHz; 80 dB @ 10 kHz											
Analog anti-aliasing filter	– Sample rate ≤ 1k S/s – Sample rate ≤ 10 kS/s – Sample rate > 10 kS/s											
	2.5 kHz (-3 dB), 1.5 kHz (-1 dB) 25 kHz (-3 dB), 15 kHz (-1 dB) 250 kHz (-3 dB), 150 kHz (-1 dB)											
Bandwidth (-3 dB digital filter)	2.5 kHz (-3 dB), 1.5 kHz (-1 dB)						0.494 fs					
	25 kHz (-3 dB), 15 kHz (-1 dB)						0.49 fs					
	250 kHz (-3 dB), 150 kHz (-1 dB)						0.38 fs					
Crosstalk fin 1 kHz [10 kHz]	120 dB [105 dB]											
Channel-to-channel phase mismatch	Typically <60 ns between channels using the same range											
Common mode voltage	±10 V _{DC}											
Overvoltage protection	±50 V _{DC}											
Supported TEDS chips	All common TEDS chips are supported.											
Supported MSI adapters	MSI adapters are not supported											
Typical power consumption	Voltage mode; no excitation						7 W					
	IEPE® mode						7 W					
	350 Ω full bridge (5 V / 10 V)						7 W / 9.5 W					
	120 Ω quarter bridge 5 V excitation						8 W					
	Bridge mode without connected sensor						11.5 W ⁷⁾					

Tab. 36: Module specifications

TRION-2402-dSTG specifications	
Weight	Approx. 200 g (RJ45 version), appr. 250 g (LEMO version)

Tab. 36: Module specifications

- 1) 1 year accuracy 23 °C ±5 °C
- 2) LP Filter in auto mode
- 3) SFDR excluding harmonics
- 4) ENOB calculated from SNR
- 5) Below 0.22 fs
- 6) Consider maximum power supply of your DEWE2 chassis
- 7) Do not switch to bridge mode if the input is open.