

TRION-PSU-15W



TRION-PSU-15W

- ▶ Power supply module
- ▶ Compact power supply for 4 active current clamps
- ▶ Ultra-low noise
- ▶ Power indicator to avoid overload
- ▶ Short-circuit protected



Module specifications

TRION-PSU-15W specifications	
Configuration	Single slot module; 4 supply connectors with common voltage rails
+15 V _{DC}	±1 %; maximum 0.5 A cumulated at all 4 channels (7.5 W); short circuit protected
-15 V _{DC}	±1 %; maximum 0.5 A cumulated at all 4 channels (7.5 W); short circuit protected
+9 V _{DC}	±1 %; maximum 0.2 A cumulated at all 4 channels (1.8 W); short circuit protected
Connector	6-pin LEMO EPL.1S.306

Tab. 78: Module specifications

Power limits

The TRION-PSU-15W comes with 4 LEDs for power indication to avoid overload.

+15 V / -15 V

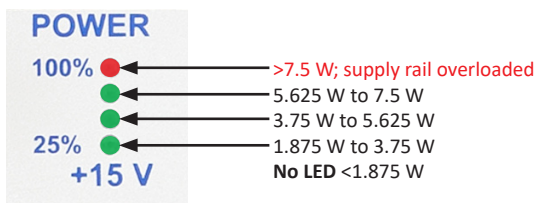


Fig. 201: +15 V / -15 V power limit

+9 V

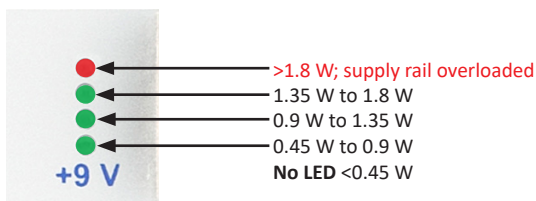


Fig. 202: +9 V power limit