



# Alvium

## 1800 U-040C

- IMX287 CMOS sensor
- ALVIUM image processing
- USB3 Vision
- Various hardware options

**Hardware option:** Closed Housing C-Mount Standard

Alvium 1800 U – Your entry into high-performance imaging

## Industrial USB cameras with attractive price-performance ratio

Alvium 1800 U-040 with Sony IMX287 runs 289.0 frames per second at 0.4 MP resolution.

Alvium 1800 U is your entry into high-performance imaging with ALVIUM® Technology for industrial applications. Equipped with the newest generation of sensors, these small and lightweight cameras deliver high image quality and frame rates at the best price-performance ratio. With its USB3 Vision compliant interface and industrial-grade hardware, it is your workhorse for different machine vision applications whether it is on a PC-based or an embedded system.

Easy software integration with [Allied Vision's Vimba Suite](#) and compatibility to the most popular third party image-processing libraries.

See the [Alvium Cameras Hardware Options](#) for lens mount and housing options, as well as the [Customization and OEM Solutions webpage](#) for additional options.

## Specifications

### Alvium 1800 U-040c Closed Housing C-Mount Standard

Product code	14161
Interface	USB3 Vision
Resolution	728 (H) × 544 (V)

## Alvium 1800 U-040c Closed Housing C-Mount Standard

Spectral range	300 to 1100 nm
Sensor	Sony IMX287
Sensor type	CMOS
Shutter mode	Global shutter
Sensor size	Type 1/2.9
Pixel size	6.9 $\mu\text{m}$ $\times$ 6.9 $\mu\text{m}$
Lens mount	C-Mount
Optical Filter	Type Hoya C5000 IR cut filter
Max. frame rate at full resolution	289 fps at $\geq$ 200 MByte/s, Mono8
ADC	12 Bit
Image buffer (RAM)	256 KB
Non-volatile memory (Flash)	1024 KB

### Imaging performance

Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured without optical filter.

Quantum efficiency at 529 nm	65 %
Temporal dark noise	3.2 $e^-$
Saturation capacity	20800 $e^-$
Dynamic range	74 dB
Absolute sensitivity threshold	4 $e^-$

### Output

Bit depth	Max. 12 Bit
Monochrome pixel formats	Mono8, Mono10, Mono10p, Mono12, Mono12p
YUV color pixel formats	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BGR8, RGB8 (default)

### General purpose inputs/outputs (GPIOs)

TTL I/Os	4 programmable GPIOs
----------	----------------------


### Operating conditions/dimensions

Operating temperature	-20 $^{\circ}\text{C}$ to +65 $^{\circ}\text{C}$ (housing)
-----------------------	--

## Alvium 1800 U-040c Closed Housing C-Mount Standard

Power requirements (DC)	Power over USB 3.1 Gen 1   External power 5.0 V
Power consumption	USB power: 1.9 W (typical)   Ext. power: 2.1 W (typical)
Mass	60 g
Body dimensions (L × W × H in mm)	38 × 29 × 29
Regulations	2014/30/EU; 2011/65/EU, incl. amendment 2015/863/EU (RoHS); FCC Class B digital device; CAN ICES-003 (B) / NMB-3 (B)

## Quantum efficiency

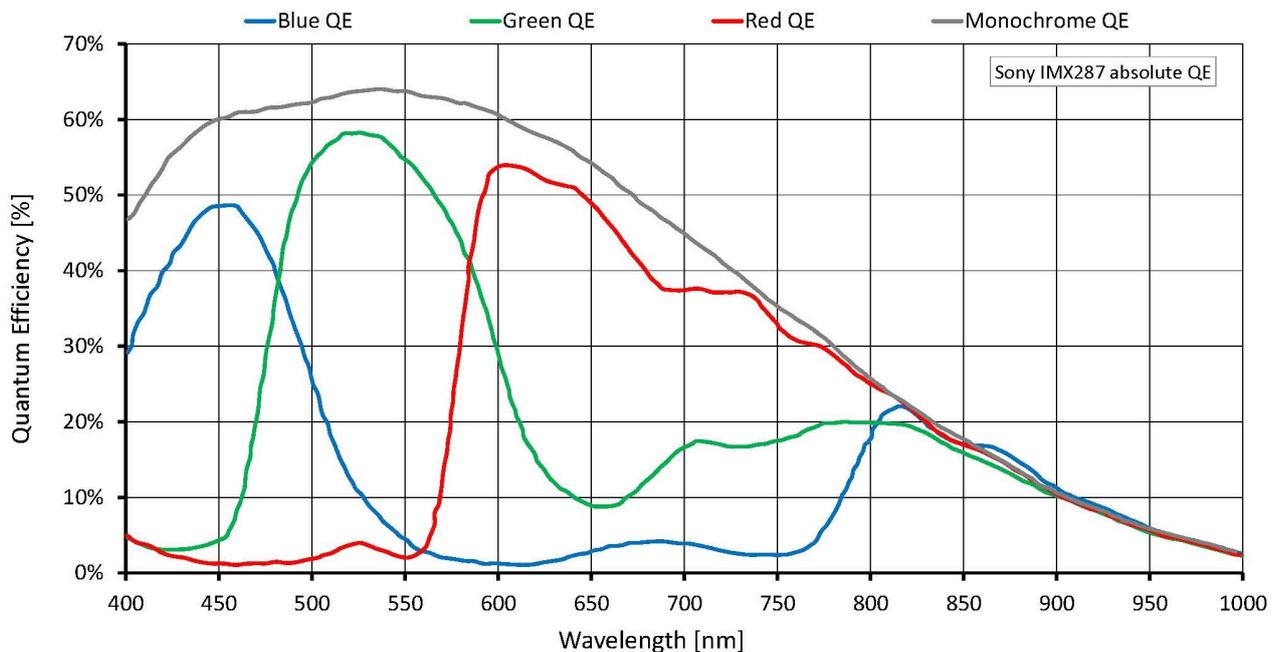

## Features

### Image control

### Auto control

- Auto exposure
- Auto gain

- Auto white balance (color models)
- Auto features regions control
- Auto features algorithms control

## Other image controls

- Binning
- Black level
- Contrast
- De-Bayering up to 5×5 (color models)
- Exposure time
- Gain
- Gamma
- Hue (color models)
- Saturation (color models)
- DPC (factory calibrated)
- FPNC (factory calibrated)
- Region of interest (ROI)
- Reverse X/Y

## Camera control

- Acquisition frame rate
- I/O and trigger control
- Temperature monitoring (sensor board)
- Status LED luminance control
- Firmware update in the field
- U3 Power Saving Mode

## Technical drawing

