



DEWETRON



IP67



-20 °C TO  
+70 °C



FANLESS

# NEX[DAQ]

## SMALL BUT POWERFUL



# NEX[DAQ]

## RUGGED USB & ETHERNET DATA ACQUISITION SYSTEM

NEX[DAQ] is the flexible “everyday tool” for all test and validation engineers and troubleshooters. Small, compact and very rugged: the 8-channel NEX[DAQ] with analog, universal inputs and a great price-performance ratio.

When connected to the USB-C or Ethernet interface of any computer, the NEX[DAQ] becomes a powerful measurement system for analog, digital, counter and CAN-bus data acquisition.

**4 ADVANCED COUNTER**  
(e.g. encoder)

**POWER SUPPLY**  
USB-C, PoE, Lemo

**USB-C CONNECTION**  
to PC for data transfer

**8 DI + 4 DO**  
**8 COUNTER**

**SYNCHRONIZATION** via  
Ethernet, PTP/IEEE1588

**ETHERNET CONNECTION**  
to PC for data transfer

Via a LAN connection it is easy to place the NEX[DAQ] close to the sensors while you and your measurement laptop are situated in a clean environment up to 100 meters away.

**UNIVERSAL ANALOG INPUT CHANNELS**  
(native direct inputs + additional via MSI)

**NATIVE INPUTS**

100 VOLTAGE	BRIDGE	CAN-BUS	DIGITAL I/O	COUNTER
----------------	--------	---------	-------------	---------

---

**ADDITIONAL INPUT SIGNALS:** Every common sensor is supported with DEWETRON's MSI sensor adapters.

MSI12-CH-2	600 VOLTAGE	CURRENT	LVDT	
THERMO-COUPLE	POTENTIO-METER	RTD	CHARGE	VIBRATION


**2 interfaces for CAN-FD and XR-MODULE connection**

XR modules for low-speed channel expansions, e.g. for many temperature channels or RTD inputs

# POWER SUPPLY OPTIONS

The NEX[DAQ] offers multiple power options for easy and worry-free use in any situation:

- > Via USB-C PD connector:
  - > For any simple power adapter with a USB-C connector
  - > For the use of a standard smartphone power bank
- > Via Lemo socket for wide range DC input, enables to connect to vehicles board grid (12 V, 24 V)
- > Via Power over Ethernet using PoE injector or PoE switch

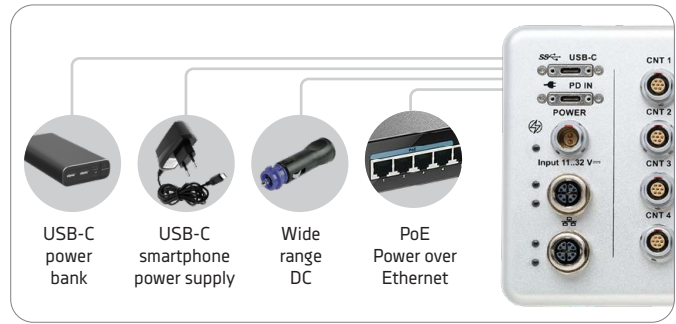

# HIGHER CHANNEL COUNTS

The NEX[DAQ] data acquisition system is distributable. If 8 channels are not enough, multiple NEX[DAQ] units can be daisy-chained to a multi-channel system at any time. A single cable is sufficient for data transfer and synchronization via Ethernet PTP/IEEE1588.


No matter if one NEX[DAQ] or several, due to its small size and weight, the NEX[DAQ] is the ideal travel companion for engineers who need to make a quick plane ride to the job site. It fits easily into any pocket and can be taken along with your laptop. This makes it ideal for trouble-shooting, maintenance or commissioning of equipment, such as test benches or machines and many more.



# SOFTWARE OXYGEN

Our measurement software OXYGEN ensures easy and quick setup of the NEX[DAQ]. Just plug & play to start the gapless data recording. Customize the software according to your measurement tasks by defining different screens and views.

OXYGEN is perfectly suited for simple data recording with a clear visualization of all data and enables meaningful reports (e.g. as PDF) to be created in record time. Monitoring applications are supported by triggered recordings and multi-file storage. For demanding measurements, OXYGEN offers enhanced features like powerful math-functions, FFT analysis, order analysis, swept sine analysis, power analysis, etc.

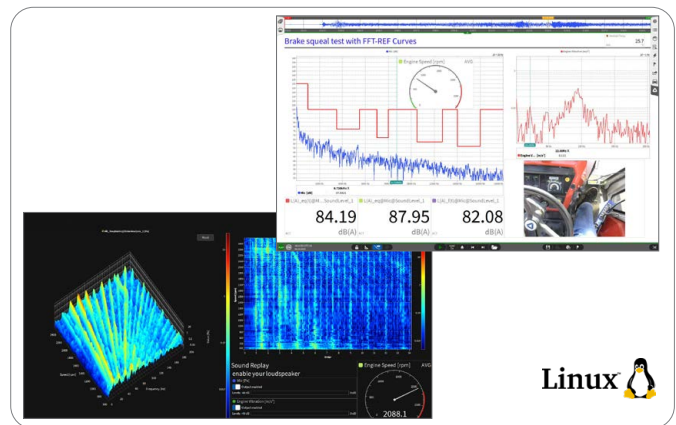

# READY FOR ALL ENVIRONMENTAL CONDITIONS



**WATERPROOF**

The NEX[DAQ] is not only reliable, but absolutely rugged. Even water will not harm it. Therefore, it has an IP67 rating, that indicates it is dust and waterproof over extended time.



**FANLESS**

Since the NEX[DAQ] does not have a fan, it is noiseless and therefore suitable for acoustic measurements. IEPE microphones are supported via MSI sensor adapters




**-20 °C TO +70 °C**

With its extended operating temperature range of -20 °C to +70 °C the NEX[DAQ] is ready for use in climate chambers, close to hot components and outdoor testing.

# APPLICATION EXAMPLES

- > Maintenance, service and troubleshooting
- > Distributed measurements with few channels at each node
- > NVH/sound testing
- > Thermal management testing of e-vehicles
- > Vehicle power consumption road test
- > Aero engine field trouble shooting
- > Material strength testing with strain gauges
- > Machinery diagnostics (e.g. Order Analysis)



242 x 120 x 43.3 mm  
9.52 x 4.72 x 1.7 inch



1250 g  
2.76 lbs



NEX[DAQ]	
Analog input	8 inputs for voltage up to $\pm 100$ V and full/half bridge, TEDS and MSI support
Further input types, via MSI sensor adapter	IEPE, quarter bridge, charge, RTD, LVDT, thermocouple, 0 to 20 mA, voltage up to $\pm 600$ V <sub>RMS</sub>
Sampling rate	24-bit, 200 kS/s or 1 MS/s per channel
Accuracy	$\pm 0.05$ % of reading, $\pm 0.02$ % of range $\pm 50$ $\mu$ V
Hardware filter	Butterworth and Bessel, 2 <sup>nd</sup> , 4 <sup>th</sup> , 6 <sup>th</sup> or 8 <sup>th</sup> order
Sensor excitation	1 V to 24 V, freely programmable
Counters, digital I/O	4 advanced counters and 8 basic counters/digital inputs, 4 digital outputs
CAN-bus	2 interfaces for CAN2.0 and CAN-FD
Interface to host PC	USB-C or Ethernet
Power supply	9 to 36 V
Power supply buffer	Buffered for 0.5 s in case of a voltage drop
Synchronization	Via Ethernet PTP/IEEE1588
Topology	Dasychain, Star

## ABOUT DEWETRON

DEWETRON is a manufacturer of precision test and measurement systems and part of the globally operating Anritsu Group. Our reliable measurement data help customers worldwide make processes more predictable, efficient, and safer.

Our strength lies in customized measurement solutions: ready to use right away while remaining flexible to adapt to dynamic testing requirements in the energy, automotive, transportation, and aerospace industries.

More than 35 years of experience and innovation have made DEWETRON a trusted partner in the global test and measurement market.

More than 25,000 DEWETRON measurement systems and over 400,000 measurement channels are in continuous use at leading companies worldwide.

DEWETRON's quality is certified according to ISO 9001 and ISO 14001. The high integrity of the measurement data is guaranteed by our own accredited calibration lab according to ISO 17025.

### THE MEASURABLE DIFFERENCE.

Get to know our  
[GLOBAL OFFICES](#)



DEWETRON

**DEWETRON Inc.**  
2850 South County Trail  
East Greenwich, RI 02818  
USA

+1-401-284-3750  
us.sales@dewetron.com  
www.dewetron.com

